

# Keysight Technologies

## M9155/6/7C PXI Hybrid Switch Modules

DC to 26.5 GHz

Data Sheet



## Overview

### Product description

Keysight Technologies, Inc. has been a leading designer and manufacturer of RF and microwave switches in the global marketplace for more than 60 years. RF and microwave switches are used extensively in microwave test systems for signal routing between instruments and devices under test (DUT).

Keysight designs and manufactures a comprehensive range of RF and microwave switches to meet your switching requirements. Other than connectorized switches, Keysight also offers switch modules that operate across a broad frequency range and come in a variety of configurations. With Keysight's proven track record in switches (high performance, quality and reliability), these modules will provide a similar set of standards of high accuracy and repeatability for automated test and measurement, signal monitoring and routing applications.

The M9155/6/7C Keysight PXI hybrid switch module series operates from a frequency range of DC to 26.5 GHz. It is being used in applications such as Automatic Test Equipment (ATE), RF communications measurement and RF parametric measurements where a rugged switching module is needed in switching systems.

The PXI hybrid switch module comes in a selection of 3 models; the integration of Keysight dual SPDT switches, dual transfer switches, and a single SP6T configurations. These PXI modules provide an exceptional 0.03 dB insertion loss repeatability, high isolation and low SWR with a long operating life up to 10 million cycles.

### Applications

- Automatic test equipment
- RF communications measurement
- RF parametric measurements

### Features

- A readily scaled integrated switching solution to satisfy your unique platform needs
- Guaranteed 0.03 dB insertion loss repeatability throughout the operating life
- Unmatched isolation of 60 dB at 26.5 GHz
- Soft Front Panel is available for each switch module

### Customer values

- Peace of mind in switch technology from Keysight who has a proven track record of providing versatile, quality RF and microwave switches
- Reduce downtime for recalibration, improve testing efficiency and hence maximize throughput
- Maximize measurement accuracy and system flexibility
- The embedded graphical user interface ease the trouble shooting of your PXI systems

### Features

- A readily scaled integrated switching solution to satisfy your unique platform needs
- Guaranteed 0.03 dB insertion loss repeatability throughout the operating life
- Typical operating life up to 10 million cycles
- Unmatched isolation of 60 dB at 26.5 GHz
- Soft Front Panel is available for each switch module


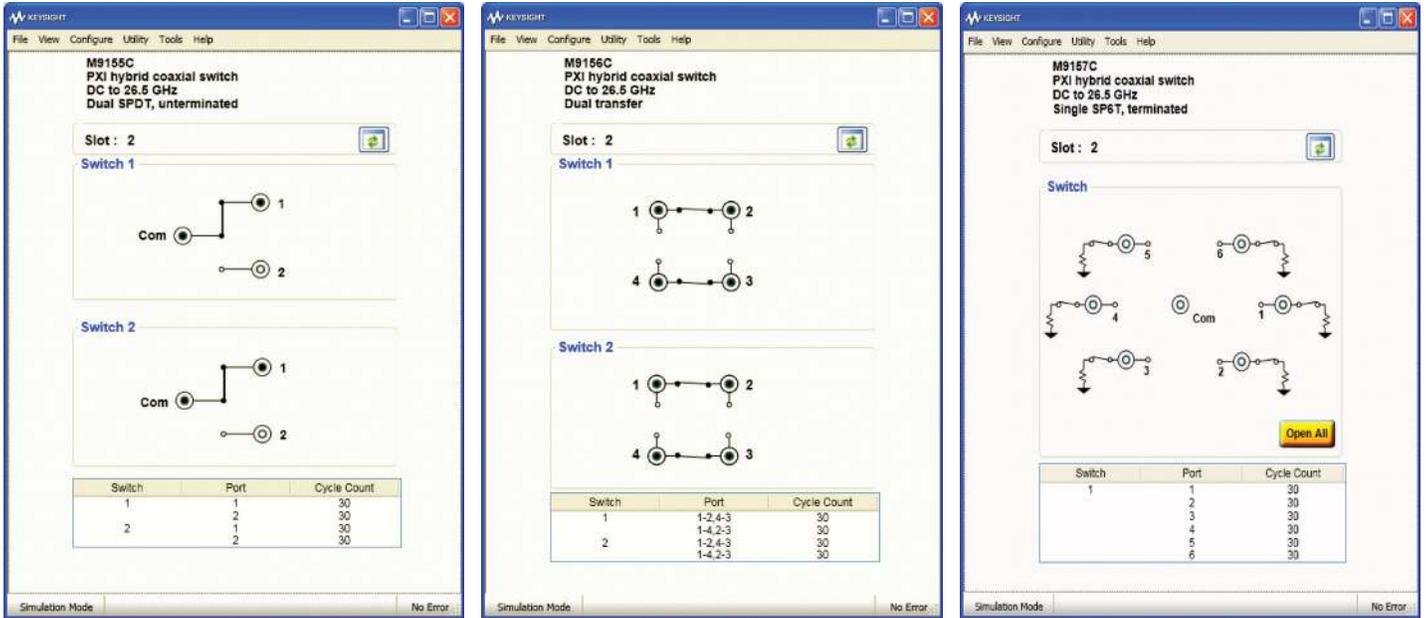


Figure 1. Soft Front Panel for M9155C, M9156C and M9157C

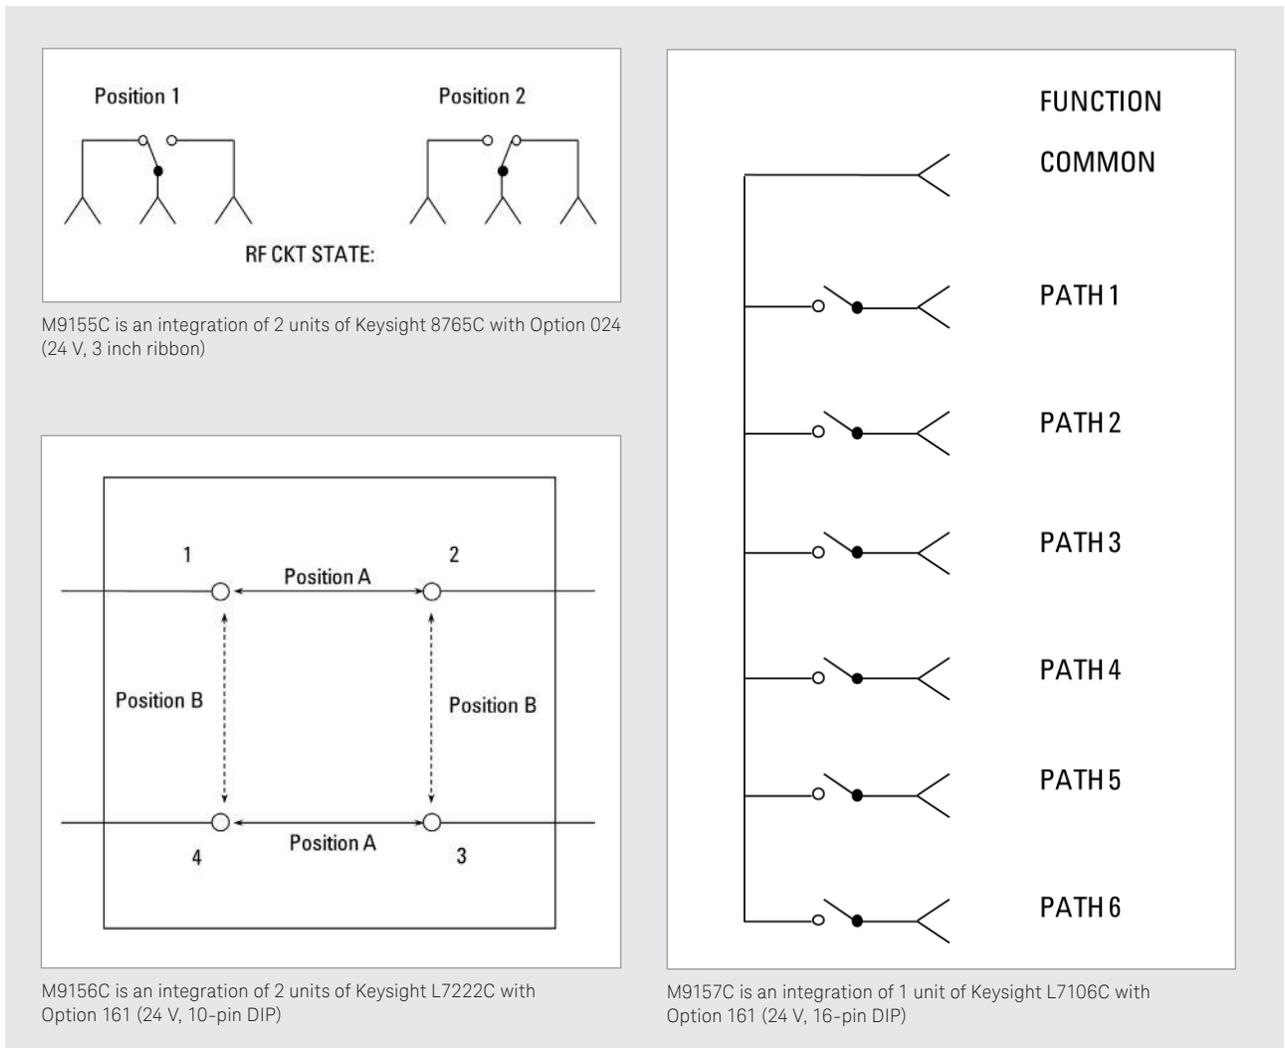

Connections are made via front panel mounted high quality RF coaxial connectors, 3.5 mm (f) or SMA (f) for 50  $\Omega$ .

The M9155/6/7C switch modules give you the most reliable and repeatable RF & micro-wave switching available in the market. Their applications are mainly in automated test equipment for example, RF communication, engineering verification and RF parametric measurement where low insertion loss and ultra high isolation are critical.

These modules provide individual cycle count trackings for each of the switch paths. Cycle count is incremented per each complete Open-Close sequence. The individual cycle count is user-retrievable, either via scripting or the Soft Front Panel. Engineers can use this feature for scheduled maintenance to reduce unexpected system downtime.

## Easy Setup ... Test ... and Maintenance

### Hardware platform

#### Compliance

The M9155/6/7C is PXI compliant, using either a PXI-H, PXI-1 or cPCI slot. Designed to benefit from fast data interfaces, the products can be integrated with other test and automation modules in PXI, CompactPCI, and Hybrid chassis. The PXI format offers high performance in a small, rugged package. It is an ideal deployment platform for many automated test systems. A wide array of complementary PXI products is currently available. Products include multimeters, waveform generators, local oscillators, digitizers, and switch multiplexers.

### Software platform

#### Drivers

Keysight's switches come complete with software drivers for Windows XP, Windows Vista, Windows 7, and LabVIEW. Also included are application code examples for LabVIEW, LabWindows/CVI, Visual Studio, C, C++, MATLAB.

#### Soft front panel

The M9155/6/7C's graphical user interface guides developers through the module setup process. Users can quickly configure the module parameters. The interfaces are implemented using the IVI standard supporting both IVI-COM and IVI-C.

#### Easy software integration

Keysight's M9155/6/7C comes complete with software drivers for Windows XP, Windows Vista, Windows 7, and LabVIEW. Also included are application code examples for LabView, LabWindows/CVI, Visual Studio, C, C++, C#, Visual Basic, and MATLAB, which provide M9155/6/7C set up and basic switching functionality. The application code examples are easily modified to quickly integrate the module into your measurement system.

### Calibration intervals

The M9155/6/7C is factory calibrated and shipped with an ISO-9001, NIST-traceable calibration certificate.

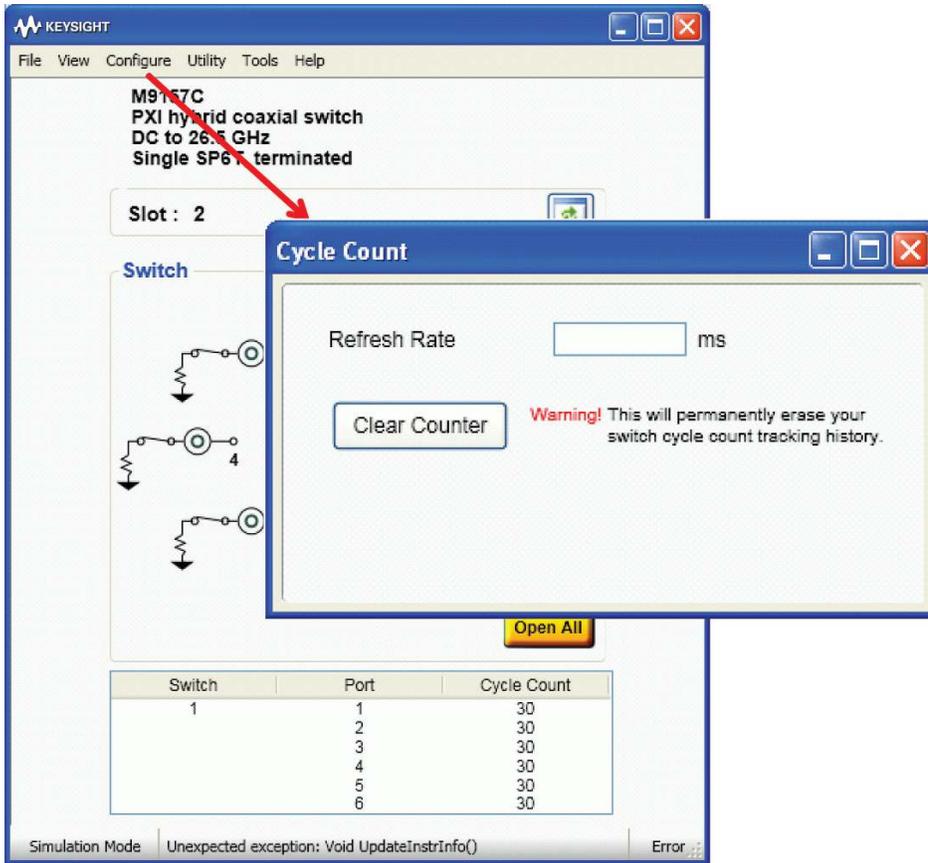


Figure 2. Onboard switch cycle count tracking eases maintenance and reduces unexpected system downtime.

## Technical Specifications

| RF input specifications               |                           |
|---------------------------------------|---------------------------|
| Input characteristics                 | M9155C, M9156C, M9157C    |
| Frequency range                       | DC to 26.5 GHz            |
| Characteristics impedance             | 50 $\Omega$               |
| Maximum RF carry power (50 $\Omega$ ) | 150 W at 100 MHz at 75 %C |
| Maximum voltage (cold-switching only) | 86.6 Vrms                 |
| Maximum carry current (per channel)   | 1.73 Arms                 |
| Initial on path resistance            | 100 m $\Omega$            |
| Off path resistance                   | > 10M $\Omega$            |

| RF specifications                       |  |  |  |  |
|---|--|--|--|--|
| Model                                   | M9155C   | M9156C   | M9157C   |  |
| Switch type                             | Dual SPDT EM switch  | Dual Transfer EM Switch  | Single SP6T EM Switch  |  |
|   | Keysight 8765C, two each   | Keysight L7222C, two each  | Keysight L7106C, one   |  |
| Dimension                               | 1 slot   | 2 slots  | 3 slots  |  |
| Frequency range                         | DC to 26.5 GHz   | DC to 26.5 GHz   | DC to 26.5 GHz   |  |
| Insertion loss<br>f is frequency in GHz | 0.25 + 0.027f<br>DC: 0.25 dB<br>8 GHz: 0.47 dB<br>12.4 GHz: 0.58 dB<br>18 GHz: 0.74 dB<br>26.5 GHz: 0.96 | 0.2 + 0.025f<br>DC: 0.20 dB<br>8 GHz: 0.40 dB<br>12.4 GHz: 0.51 dB<br>18 GHz: 0.65 dB<br>26.5 GHz: 0.86 dB | 0.3 + 0.015f<br>DC: 0.30 dB<br>8 GHz: 0.42 dB<br>12.4 GHz: 0.49 dB<br>18 GHz: 0.57 dB<br>26.5 GHz: 0.70 dB |  |
| Isolation                               | 110 - 2.25f<br>DC: 110 dB<br>8 GHz: 92 dB<br>12.4 GHz: 82 dB<br>18 GHz: 70 dB<br>26.5 GHz: 50 dB         | 110 - 2f<br>DC: 110 dB<br>8 GHz: 94 dB<br>12.4 GHz: 85 dB<br>18 GHz: 74 dB<br>26.5 GHz: 57 dB              | DC - 12 GHz: 90 dB<br>12 - 15 GHz: 70 dB<br>15 - 20 GHz: 65 dB<br>20 - 26.5 GHz: 60 dB                     |  |
| VSWR                                    | DC - 4 GHz: 1.25<br>4 - 18 GHz: 1.45<br>18 - 26.5 GHz: 1.70  | DC - 2 GHz: 1.10<br>2 - 4 GHz: 1.15<br>4 - 12.4 GHz: 1.25<br>12.4 - 20 GHz: 1.40<br>20 - 26.5 GHz: 1.65    | DC - 4 GHz: 1.20<br>4 - 12.4 GHz: 1.35<br>12.4 - 20 GHz: 1.45<br>20 - 26.5 GHz: 1.70                       |  |
| Guaranteed operating life               | 5 million cycles   | 2 million cycles   | 2 million cycles   |  |
| Typical operating life                  | 10 million cycles  | 5 million cycles   | 5 million cycles   |  |
| Insertion loss repeatability            | 0.03 dB  | 0.03 dB  | 0.03 dB  |  |
| Impedance                               | 50 $\Omega$  | 50 $\Omega$  | 50 $\Omega$  |  |
| RF connectors                           | 3.5 mm (f)   | SMA (f)  | SMA (f)  |  |

### Power requirements

Power consumption from the backplane supply is as follows:

|         |                    |                    |       |                    |
|---------|--------------------|--------------------|-------|--------------------|
| Voltage | +3.3 V             | +5 V               | -12 V | +12 V              |
| Current | 0.5 A (typ. 0.2 A) | 20 mA (typ. 10 mA) | 0     | 0.4 A (typ. 0.2 A) |

### General operating data

Maximum power rating:

M9155C which contains two each of 8765C

Hot switching: 2 W average for switching with power applied

Cold switching 150 W CW at 3 GHz, 25 °C, 120 W CW at 4.2 GHz, 25 °C

## Technical Specifications (continued)

### General operating data (continued)

M9156C which contains two each of L7222C

Hot switching: 1W CW, 50 W peak, 10 us max pulse width, not to exceed 1 W average

Cold switching 150 W CW at 3 GHz, 25 °C, 120 W CW at 4.2 GHz, 25 °C

M9157C which contains one L7106C

Into internal termination

Hot switching: 1W CW, 50 W peak, 10 μs max pulse width, not to exceed 1 W average

Into thru path

Hot switching: 2 W CW, 100 W peak, 10 μs max pulse width, not to exceed 2 W average

Cold switching: 150 W CW at 3 GHz, 25 °C, 120 W CW at 4.2 GHz, 25 °C

### Environmental and physical specifications

Temperature

Operating 0 to 55 °C

Non-operating -40 to 70 °C

Relative humidity

Operating 95% RH at 40 °C, 24 hours cycling, repeated 5 times

Non-operating 50% RH at -10 °C to 25 °C, 24 hour cycle

Vibration

Operating random 5 - 500 Hz, 0.3 g RMS

Vibration

Survival random vibration 5 - 500 Hz, 3.41 g RMS

Shock

End use handling shock Half-sine wave form, 120 in/s, duration < 3ms

Transportation shock Trapezoidal, 50 g

Altitude test

Operating/non-operation 15,000 ft (4600 m)

ESD Immunity

Air discharge 15 kV per IEC61000-4-2

Direct discharge<sup>1</sup> 8 kV per IEC61000-4-2

Safety

This product has input power below the requirements as specified in the Low Voltage Directive (2006/95/EC)

EMC

EMC Standard: IEC 61326-1:2005/EN 61326-1:2006

Emissions : CISPR 11:2003/EN55011:2007

Immunity: IEC 61000-4-3:2002 / EN 61000-4-3:2002

Electrostatic Discharge : IEC 61000-4-2:2001/EN 61000-4-2:1995+A1:1998+A2:2001

EMC/EMI : CE, C-Tick

CE compliance

EMC Compatibility Directive (EMC): 2004/108/EC

Warm-up time

Refer to PXI Chassis warm up time

Dimensions

3U PXI/CompactPCI standard

Front panel complies with IEEE 1101.10 certification and compliance

M9155C

174.8 x 128.7 x 20 mm

M9156C

174.8 x 128.7 x 40.3 mm

M9157C

174.8 x 128.7 x 60.7 mm

Weight

M9155C

0.395 kg

M9156C

0.255 kg

M9157C

0.340 kg

Connectors

PXI bus via 32 bit P1/J1 backplane connector. Signals via front panel mounted coaxial 3.5 mm (f) or SMA(f) connectors.

Contact Material

Beryllium copper, gold plated

Connector compatibility

PXI-h, PXI-1, cPCI

1. To outer conductor

## Configuration

### Hardware

#### Recommended configuration

| Model  | Description  |
|--------|--|
| M9018A | PXIe Chassis, 18-slots, 3U, 8 Gb/s                                 |
| M9155C | PXI Hybrid Coaxial Switch, DC to 26.5 GHz, dual SPDT, unterminated |
| M9156C | PXI Hybrid Coaxial Switch, DC to 26.5 GHz, dual Transfer           |
| M9157C | PXI Hybrid Coaxial Switch, DC to 26.5 GHz, single SP6T, Terminated |
| M9021A | PXIe System Interface  |

### Accessories

SMA male-male cable (semi-rigid)

### Module and chassis compatibility

#### PXI chassis compatibility

Compatible with all chassis conforming to the 3U PXI and 3U cPCI specifications

Compatible with Keysight M9018A PXIe chassis, 18-slots, 3U, 8 Gb/s

### Related products

| Model     | Description  |
|-----------|--|
| M9155CH40 | PXI hybrid coaxial switch, DC to 40 GHz, Dual SPDT, unterminated |
| M9156CH40 | PXI hybrid coaxial switch, DC to 40 GHz, Dual transfer           |
| M9157CH40 | PXI hybrid coaxial switch, DC to 40 GHz, Single SP6T, terminated |
| M9392A    | PXI Vector Signal Analyzer                                       |
| M9302A    | PXI Local Oscillator   |
| M9351A    | PXI Downconverter: (50 MHz–2.9 GHz)                              |
| M9360A    | PXI Attenuator/Preselector                                       |
| M9361A    | PXI Downconverter: (2.75 GHz–26.5 GHz)                           |

## Ordering

| Model  | Description  |
|--------|--|
| M9155C | PXI hybrid coaxial switch, DC to 26.5 GHz, Dual SPDT, unterminated |
| M9156C | PXI hybrid coaxial switch, DC to 26.5 GHz, Dual transfer           |
| M9157C | PXI hybrid coaxial switch, DC to 26.5 GHz, Single SP6T, terminated |

## Mechanical Dimensions

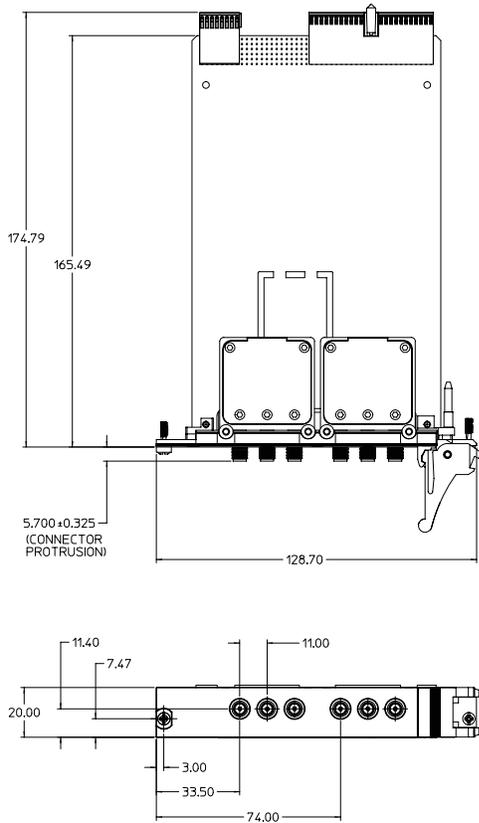


Figure 3. M9155C

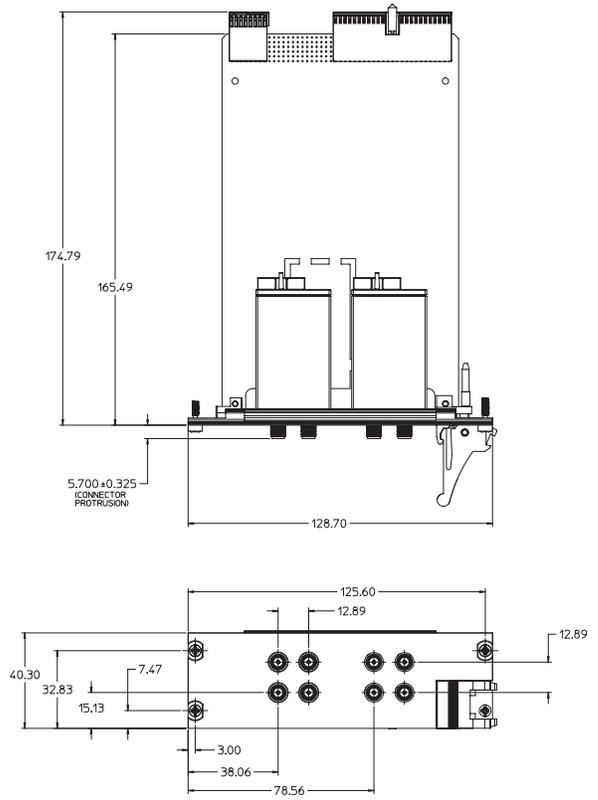


Figure 4. M9156C

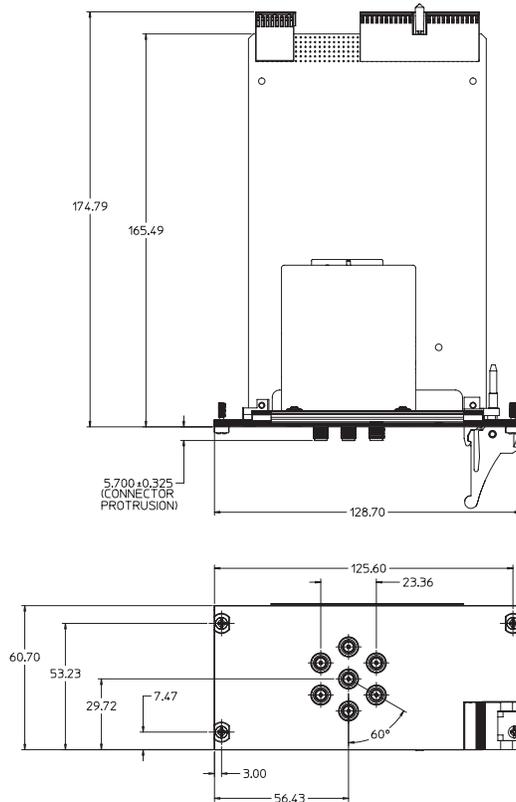


Figure 5. M9157C

**myKeysight**

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/quality](http://www.keysight.com/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System



**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/modular](http://www.keysight.com/find/modular)

[www.keysight.com/find/PXIswitch](http://www.keysight.com/find/PXIswitch)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

**Asia Pacific**

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

**Europe & Middle East**

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 0800 000154   |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-07-10-14)