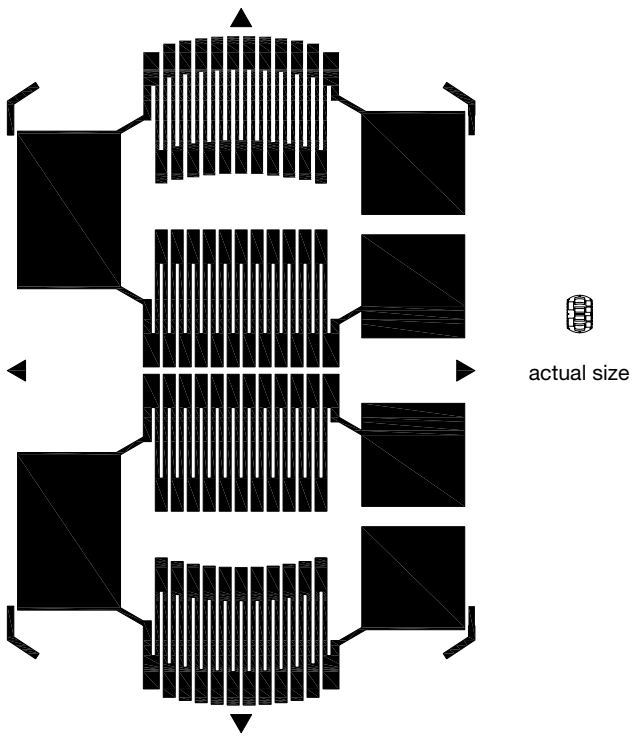


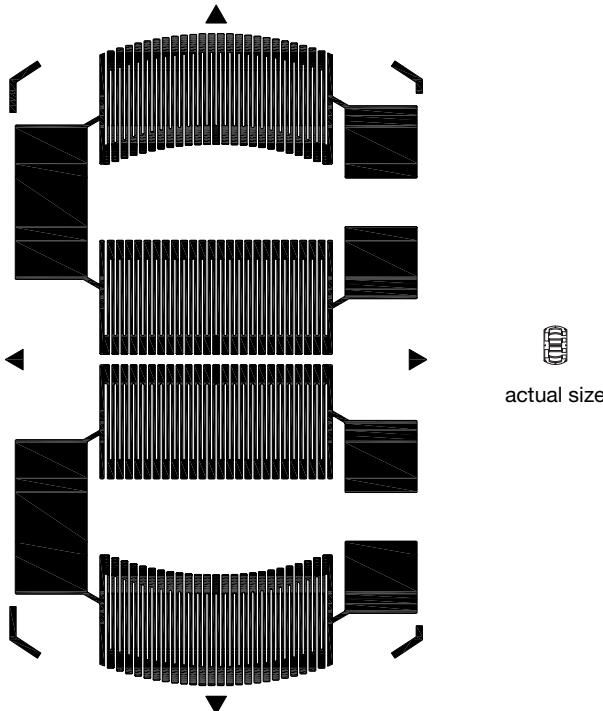
Advanced Sensors

S5065 GAGE PATTERN DATA			
 <p>actual size</p>	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5065M-350/DG/E3	350 ±0.3%	M*
	N5K-XX-S5065M-350/DG/E3	350 ±0.3%	M*
<p>DESCRIPTION</p> <p>Full-bridge gage for use on 0.200 in (5.08 mm) diameter diaphragm.</p> <p>RoHS-compliant.</p>			

GAGE DIMENSIONS					
					<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.019	0.178	0.053	0.122	0.20	0.13
0.48	4.52	1.35	3.10	5.1	3.4

* Only creep code available for this gage.
Copper plating for tabs is available.

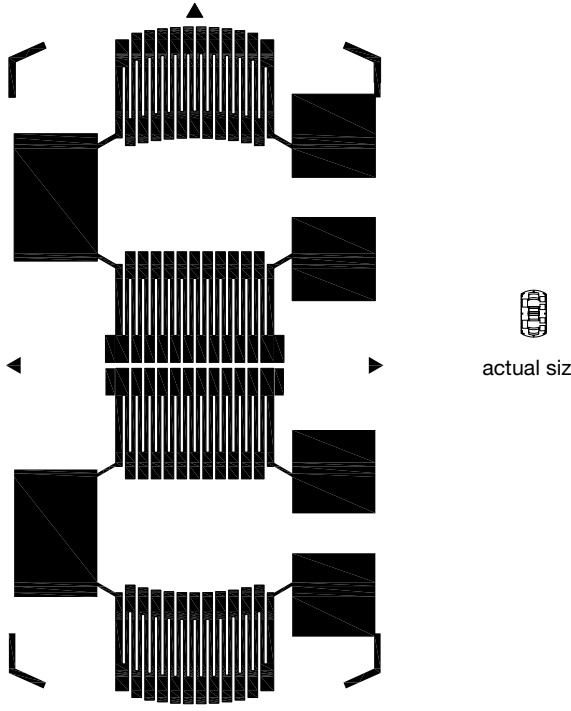
Advanced Sensors

S5021 GAGE PATTERN DATA			
 <p>actual size</p>	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5021M-50C/DG/E3	5000 ±0.3%	M*
	N5K-XX-S5021M-50C/DG/E3	5000 ±0.3%	M*
<p>DESCRIPTION</p> <p>Full bridge gage for use on 0.200 in (5.080 mm) diameter diaphragm.</p> <p>RoHS-compliant.</p>			

GAGE DIMENSIONS							
<table border="1"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.019	0.187	0.065	0.112	0.20	0.12		
0.49	4.74	1.64	2.83	5.1	3.1		

* Only creep code available for this gage.
Copper plating for tabs is available.

Advanced Sensors

S5066 GAGE PATTERN DATA			
 <p>actual size</p>	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5066M-350/DG/E3	350 ±0.3%	M*
	N5K-XX-S5066M-350/DG/E3	350 ±0.3%	M*
<p>DESCRIPTION</p> <p>Full-bridge gage for use on 0.250 in (6.35 mm) diameter diaphragm. RoHS-compliant.</p>			

GAGE DIMENSIONS							
<table border="1"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.019	0.224	0.053	0.122	0.25	0.13		
0.48	5.69	1.35	3.10	6.4	3.4		

* Only creep code available for this gage.
Copper plating for tabs is available.

Advanced Sensors

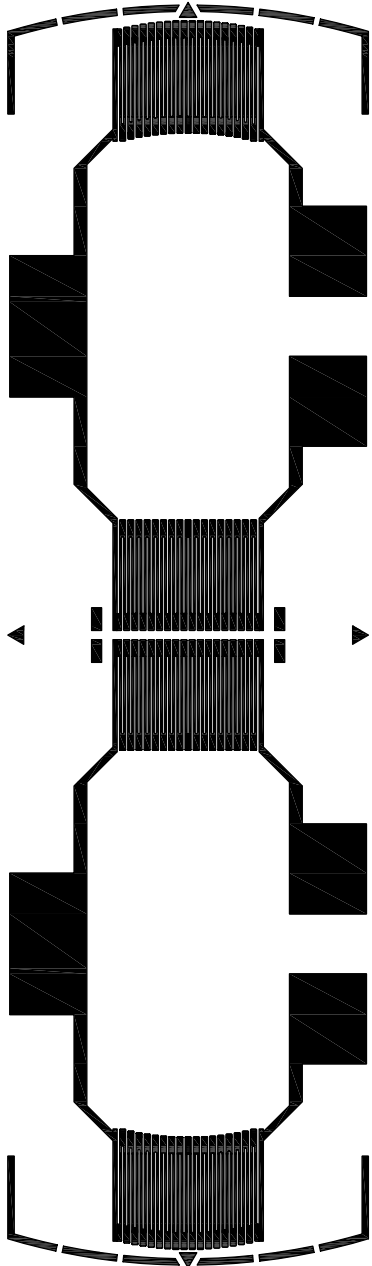
S5022 GAGE PATTERN DATA			
	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5022M-50C/DG/E3	5000 ±0.3%	M*
	N5K-XX-S5022M-50C/DG/E3	5000 ±0.3%	M*
<p>DESCRIPTION</p> <p>Full bridge gage for use on 0.250 in (6.35 mm) diameter diaphragm. RoHS-compliant.</p>			

GAGE DIMENSIONS							
<table border="1"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.020	0.228	0.047	0.102	0.25	0.11		
0.52	5.78	1.19	2.59	6.4	2.8		

* Only creep code available for this gage.
Copper plating for tabs is available.

Advanced Sensors

S5026 GAGE PATTERN DATA



actual size

GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
N2K-XX-S5026M-50C/DG/E3	5000 ±0.3%	M*
N5K-XX-S5026M-50C/DG/E3	5000 ±0.3%	M*

DESCRIPTION

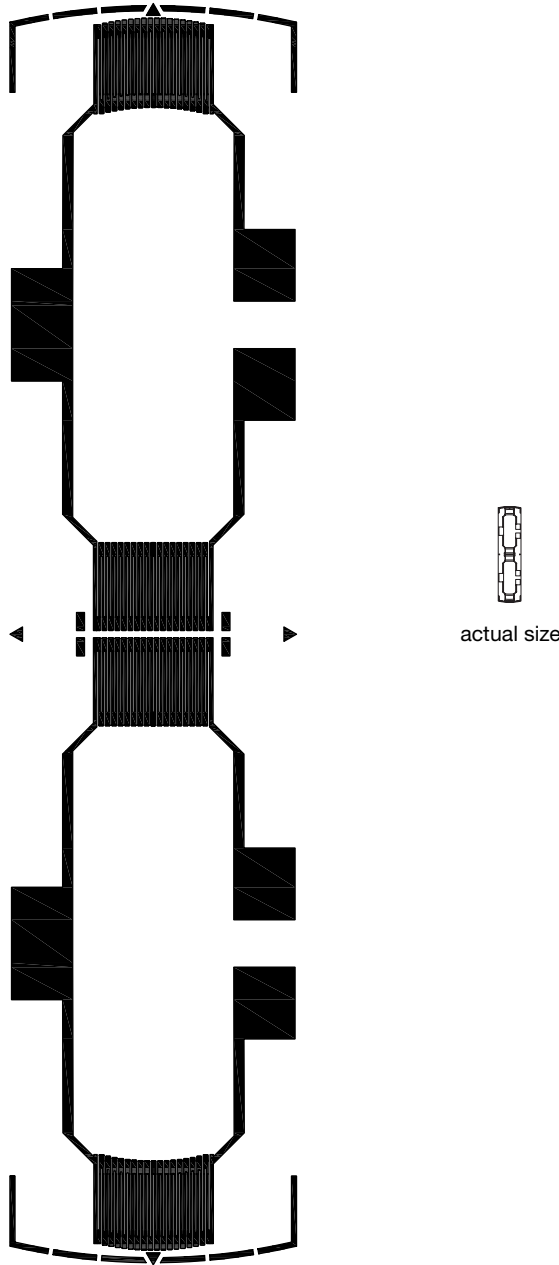
Full bridge pattern for use on 0.400 in (10.16 mm) diameter diaphragm.
RoHS-compliant.

GAGE DIMENSIONS

inch
millimeter

Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.020	0.382	0.044	0.111	0.40	0.12
0.52	9.70	1.13	2.82	10.7	3.1

* Only creep code available for this gage.
Copper plating for tabs is available.

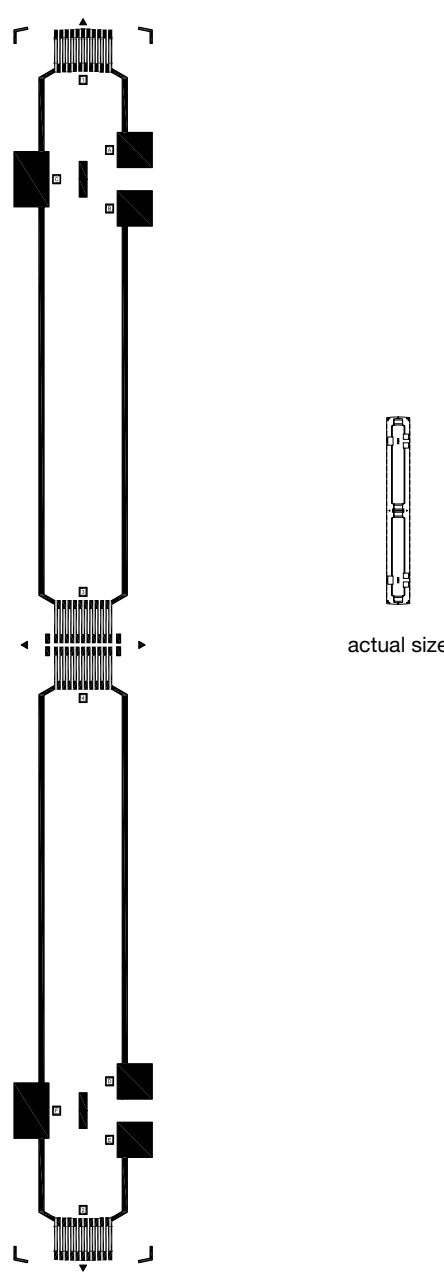
S5025 GAGE PATTERN DATA			
	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5025M-50C/DG/E3	5000 ±0.3%	M*
	N5K-XX-S5025M-50C/DG/E3	5000 ±0.3%	M*
<p>DESCRIPTION</p> <p>Full bridge pattern for use on 0.500 in (12.7 mm) diameter diaphragm. RoHS-compliant.</p>			

GAGE DIMENSIONS					
					inch
					millimeter
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width
0.020	0.482	0.044	0.111	0.50	0.12
0.52	12.24	1.13	2.82	12.7	3.1

* Only creep code available for this gage.
Copper plating for tabs is available.

Advanced Sensors

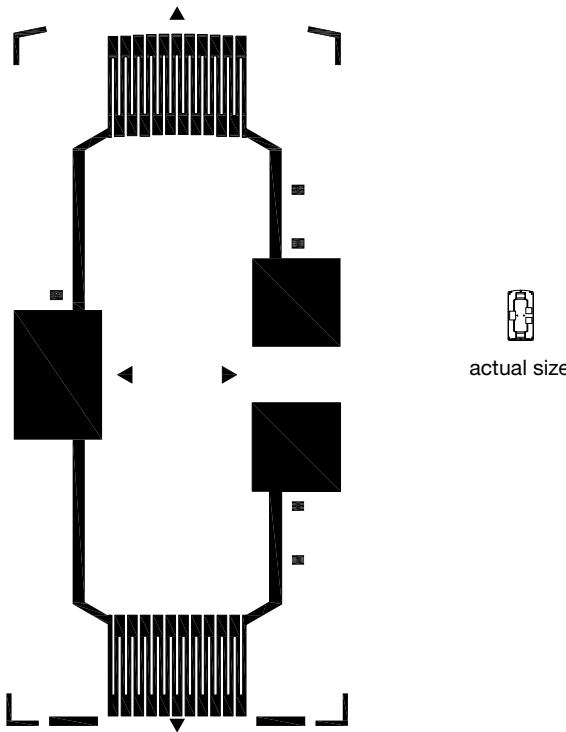
S5071 GAGE PATTERN DATA

	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5071M-50C/DG/E3 N5K-XX-S5071M-50C/DG/E3	5000 ±0.3% 5000 ±0.3%	M* M*
<p>DESCRIPTION</p> <p>Full-bridge pattern for use on 1.00 in (25.4 mm) diameter diaphragm. RoHS-compliant.</p>			

GAGE DIMENSIONS							
<table border="1"> <tr><td>inch</td></tr> <tr><td>millimeter</td></tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.020	0.982	0.047	0.111	1.00	0.12		
0.51	24.94	1.19	2.82	25.4	3.1		

* Only creep code available for this gage.
Copper plating for tabs is available.

Advanced Sensors

S5050 GAGE PATTERN DATA			
 <p>actual size</p>	GAGE DESIGNATION	RESISTANCE IN OHMS	STD. CREEP CODE
	N2K-XX-S5050M-30C/DG/E3 N5K-XX-S5050M-30C/DG/E3	3000 ±0.3% 3000 ±0.3%	M* M*
<p>DESCRIPTION</p> <p>Half diaphragm. RoHS-compliant.</p>			

GAGE DIMENSIONS							
<table border="1"> <tr> <td>inch</td> </tr> <tr> <td>millimeter</td> </tr> </table>						inch	millimeter
inch							
millimeter							
Gage Length	Overall Length	Grid Width	Overall Width	Matrix Length	Matrix Width		
0.020	0.231	0.047	0.111	0.25	0.13		
0.51	5.87	1.19	2.82	6.4	3.2		

* Only creep code available for this gage.
Copper plating for tabs is available.