

Features

- Maximum 500mA peak output current
- Ultra Low Dropout Voltage
Typically 200mV at 500mA Output Current
- High Output Accuracy over Line, Load and Temperature
- Build-In Soft-Start
- Excellent startup under load from 0 to 500mA
- Power-On-Reset Monitoring on V_{DD} Pin
- Foldback over Current Protection and Thermal shutdown
- Low ESR Output Capacitor(Multi-layer Chip Capacitors (MLCC)) Applicable
- TSOT-23-5,SOT-23-5 and TDFN6-2x2 packages
- Green Product (RoHS, Lead-Free, Halogen-Free Compliant)

Applications

- Notebook PC Applications
- Motherboard Applications
- LCD Monitor
- Telecom Equipment
- Graphic Cards
- DVD-video Player

Typical Application

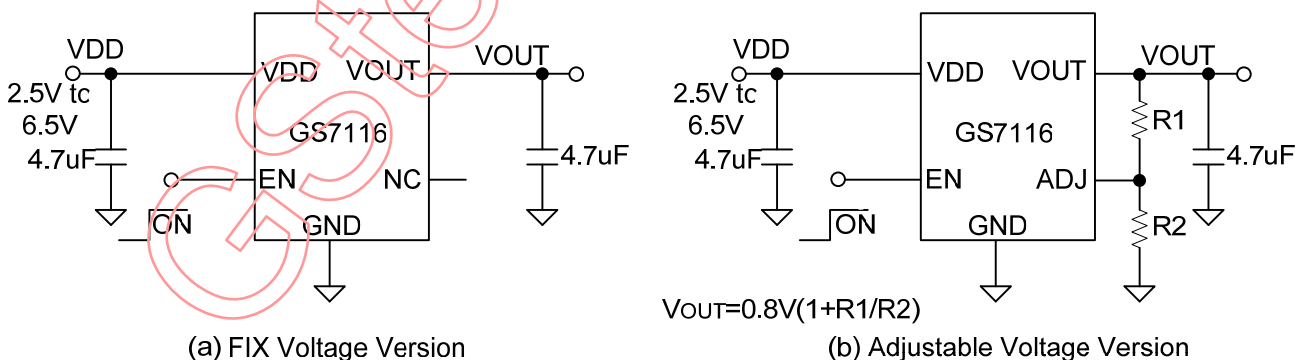


Figure 1 Typical Application of GS7116

This document is GStek's confidential information. Anyone having confidential obligation to GStek shall keep this document confidential. Any unauthorized disclosure or use beyond authorized purpose will be considered as violation of confidentiality and criminal and civil liability will be asserted.

General Description

The GS7116 is a high performance regulator which can deliver up to 500mA of continuous output current with a typical dropout voltage of only 200mV using internal p-channel MOSFETs. The GS7116 allows the use of low-ESR ceramic capacitor as low as 4.7uF. Moreover the IC provides good performance on both line transient response and load transient response. The GS7116 provides foldback over current limit and thermal shutdown to prevent the linear regulator from damage. Built-in soft-start minimizes stress on the input power source by reducing capacitive inrush current on start-up. The GS7116 is available in the TSOT-23-5 ,SOT-23-5 and TDFN6-2x2 packages.

Function Block Diagram

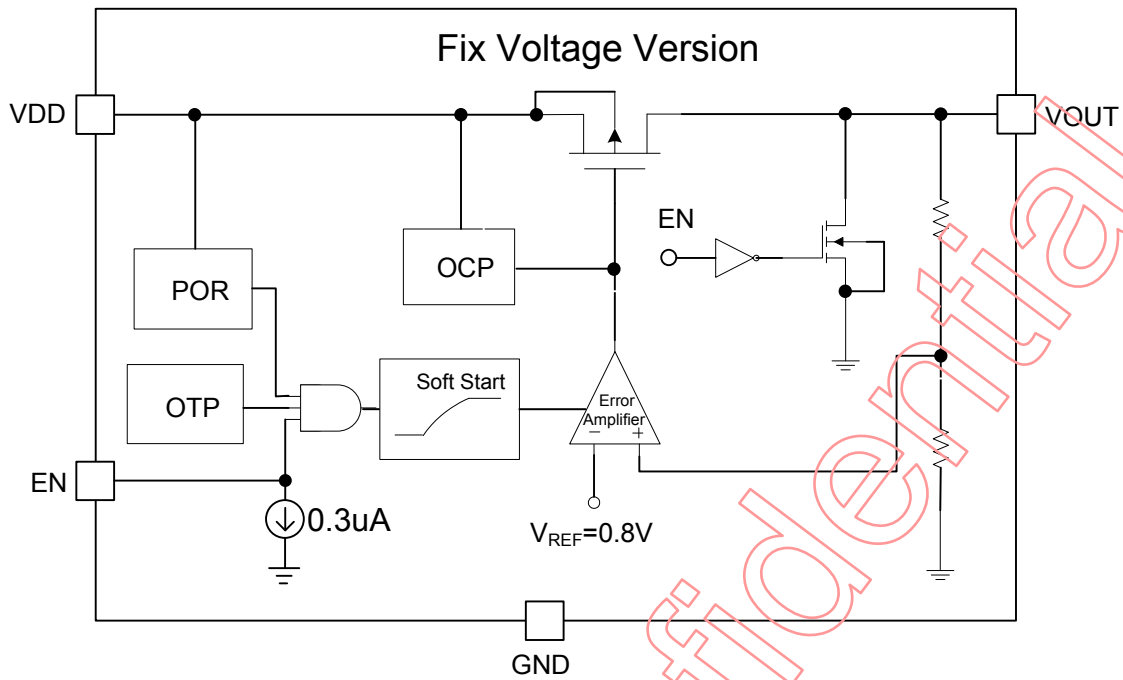


Figure 2a Function Block Diagram (Fix)

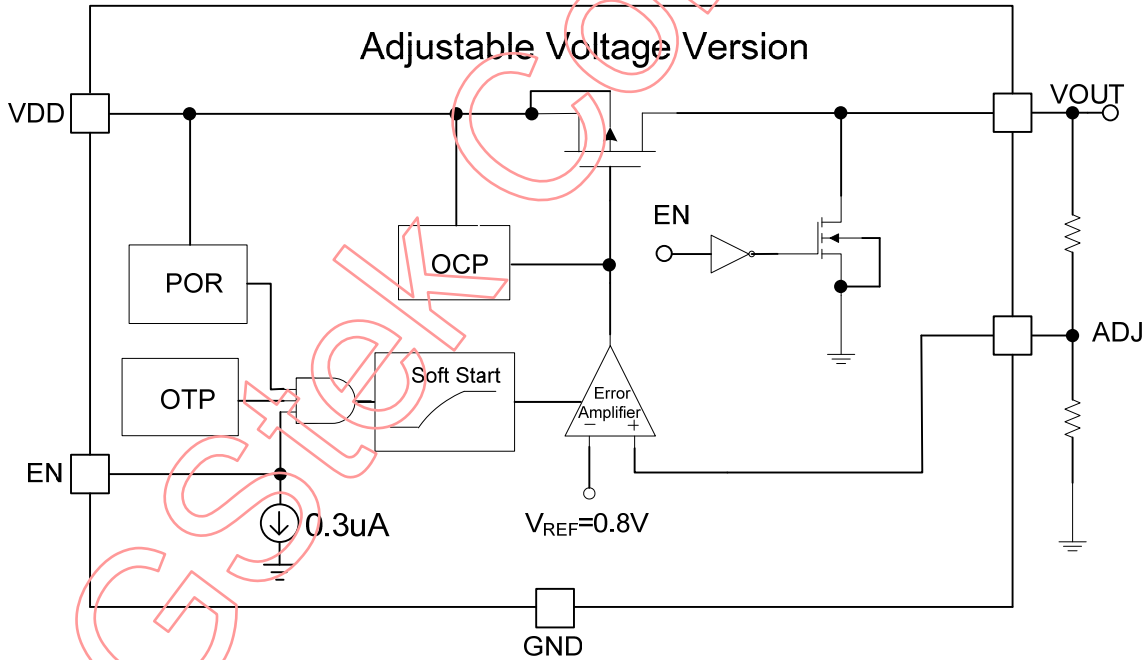


Figure 2b Function Block Diagram (ADJ)

Pin Configuration




Figure 3a TDFN6-2x2 Package

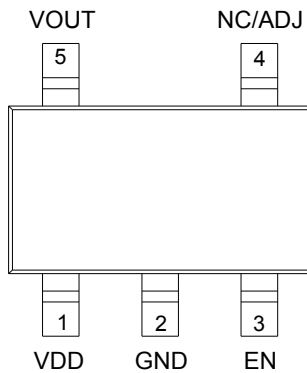


Figure 3b SOT-23-5(S5)/TSOT-23-5 Package

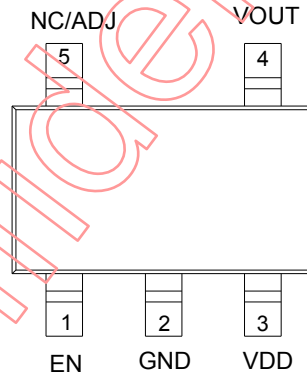


Figure 3c SOT-23-5(ST)

Pin Descriptions

No				Name	I/O type	Description
TSOT-23-5	SOT-23-5 (S5)	SOT-23-5 (ST)	TDFN6-2x2			
1	1	3	3,7	VDD	I/O	Supply voltage
2	2	2	2	GND	I/O	Ground.
3	3	1	1	EN	I	Enable input (active high)
4	4	5	6	ADJ	I	Adjustable input. Feedback pin connect to resistor divider.
			5/6	NC		No internal Connection.
5	5	4	4	VOUT	O	Output Voltage. The power output of the device.

Ordering Information

GS7116S PP-XXX- R



No	Item	Contents
0	Soft Start Time	Unmarked: Soft Start=150us A: Soft Start=650us
1	Package	T5: TSOT-23-5 S5:SOT-23-5 ST:SOT-23-5 TD: TDFN6-2x2
2	Output Voltage	ADJ: 0.8V to 6.5V 1P2:1.2V, 1P8:1.8V, 2P5: 2.5V, 2P8: 2.8V, 285: 2.85V, 3P0: 3.0V, 3P3: 3.3V, 5P0: 5.0V GS7116S5 only fix output voltage
3	Shipping	R: Tape & Reel

Example: GS7116 Soft Start=150us,TSOT-23-5,2.5V,Tape & Reel ordering information is "GS7116T5-2P5-R"

Absolute Maximum Rating (Note 1)

Parameter	Symbol	Maximum	Units
Control Voltage	V _{DD}	7	V
Package Power Dissipation at T _A =25°C	P _{D_TSOT-23-5}	420	mW
Package Power Dissipation at T _A =25°C	P _{D_SOT-23-5}	420	mW
Package Power Dissipation at T _A =25°C	P _{D_TDFN6-2x2}	1087	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	- 65 ~ 150	°C
Lead Temperature (Soldering) 10S	T _{LEAD}	260	°C
ESD (Human Body Mode) (Note 2)	V _{ESD_HBM}	2K	V
ESD (Machine Mode) (Note 2)	V _{ESD_MM}	200	V

Thermal Information (Note 3)

Parameter	Symbol	Limits	Units
Thermal Resistance Junction to Ambient	$\theta_{JA_TSOT-23-5}$	238	°C/W
Thermal Resistance Junction to Ambient	$\theta_{JA_SOT-23-5}$	238	°C/W
Thermal Resistance Junction to Ambient	$\theta_{JA_TDFN6-2x2}$	92	°C/W

Recommend Operating Condition (Note 4)

Parameter	Symbol	Limits	Units
Control Voltage	V_{DD}	$(V_{OUT} + V_{DROPOUT}) < V_{DD} < 6.5$	V
Junction Temperature	T_J	-40 ~ 125	°C
Ambient Temperature	T_A	-40 ~ 85	°C

Electrical Characteristics

$V_{IN}=V_{OUT}+1V, I_{OUT}=0.1mA, C_{VDD}=4.7\mu F, C_{LOAD}=4.7\mu F, T_A=25^\circ C$, unless otherwise specified.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Input Voltage	V_{DD}		$V_{OUT}+V_{DROPOUT}$ (V_{DD} must $\geq 2.3V$)		6.5	V
Output Voltage accuracy	V_O		-2		2	%
Output Voltage Temp.Coefficient	T_{COUT}			50		ppm/°C
Dropout Voltage (Note 5)	$V_{DROPOUT}$	$I_O=500mA, V_O=3.3V$		260	350	mV
Dropout Voltage (Note 6)	$V_{DROPOUT}$	$I_O=500mA, V_O=3.3V$		300	450	mV
Line Regulation		$V_{DD} = V_O + 1V$ to 6.5V	-0.2		0.2	%
Load Regulation		$I_O=0.1mA$ to 500mA			40	mV
Current limit	I_{LIMIT}		550	700	820	mA
Short current limit (Note 7)	I_{SC}	$V_O < 0.2$		100		mA
Quiescent Current	I_Q			95	130	uA
V_{DD} Shutdown Current	I_{SHDN}				1	uA
V_{OUT} Pull Low Resistor		$V_{EN}=0$	65		100	Ω
Adjustable input voltage	V_{ADJ}	$I_{OUT}=0.1mA$		0.8		V
POR threshold				2.1		V

Power supply rejection	PSRR	$I_o=150mA$	f=1KHz	70	dB	
			f=20KHz	43		
Enable Input						
EN Threshold	Logic-Low Voltage	V_{EN-L}		0.4	V	
	Logic-High Voltage	V_{EN-H}	1.6			
EN Input Bias Current	I_{EN}	$V_{EN}=5V$	0.3	1	uA	
Soft Start						
Soft Start Time	T_{SS}	For GS7116	50	150	200	us
		For GS7116A	500	650	800	
Thermal Protection						
Over temperature shutdown	T_{SD}			160	°C	
Return temperature				130		

Note 1. Stresses listed as the above “Absolute Maximum Ratings” may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.

Note 2. Devices are ESD sensitive. Handling precaution recommended.

Note 3. θ_{JA} is measured in the natural convection at $T_A=25^\circ C$ on a high effective thermal conductivity test board (4 Layers, 2S2P) of JEDEC 51-7 thermal measurement standard.

Note 4. The device is not guaranteed to function outside its operating conditions.

Note 5. The Dropout voltage is defined as $V_{IN}-V_{OUT}$, which is measured when V_{OUT} is $0.98 \cdot V_{OUT(NORMAL)}$. Specification for TSOT-23-5, TDFN6-2x2.


Note 6. The Dropout voltage is defined as $V_{IN}-V_{OUT}$, which is measured when V_{OUT} is $0.98 \cdot V_{OUT(NORMAL)}$. Specification for SOT-23-5.

Note 7. If V_{out} is detected as $<0.2V$, then I_o is restricted to typical 100mA.


Typical Characteristics

(shown for 3.3V output option) $V_{IN}=4.3V, C_{VDD}=4.7\mu F, C_{LOAD}=4.7\mu F, T_A=25^\circ C$, unless otherwise specified.


Output Voltage vs. Input Voltage

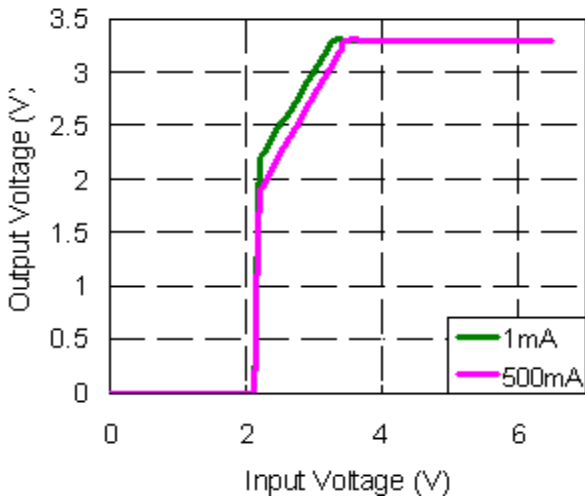


Line Regulation

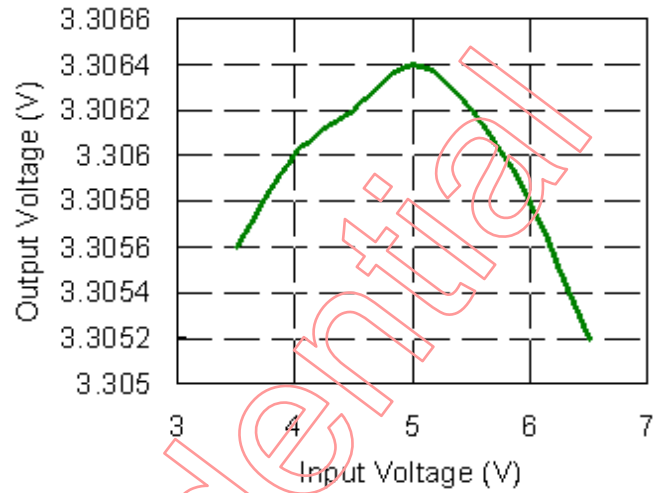


Load Regulation

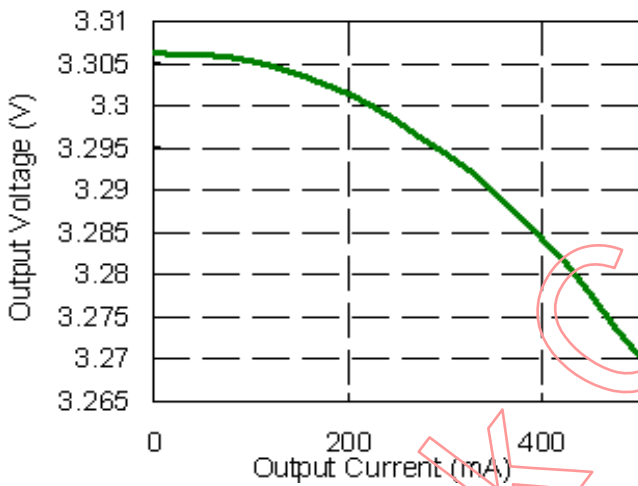


Ground Current vs. Load Current

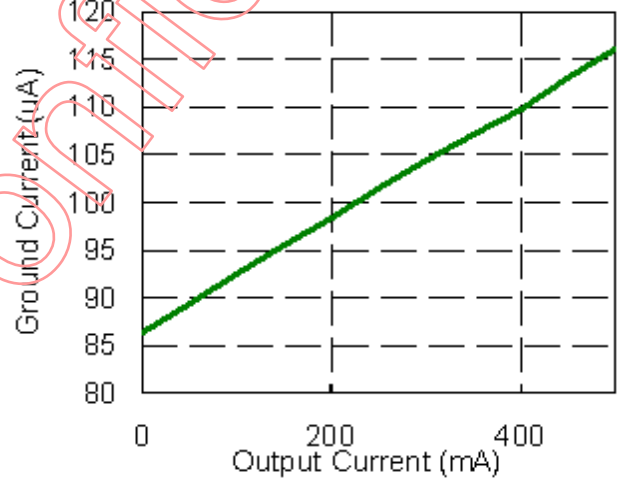


Output Voltage vs. Temperature

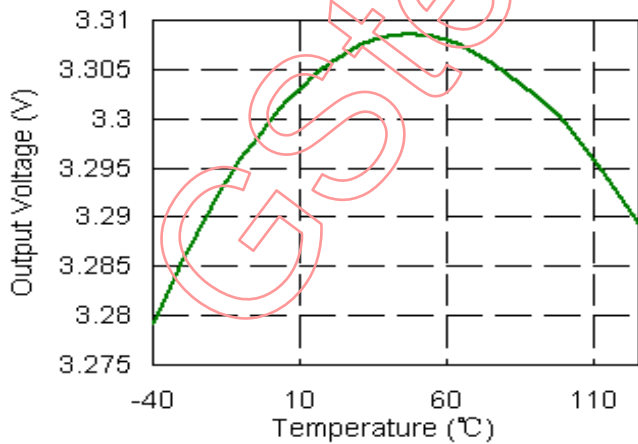


Ground Current vs. Temperature

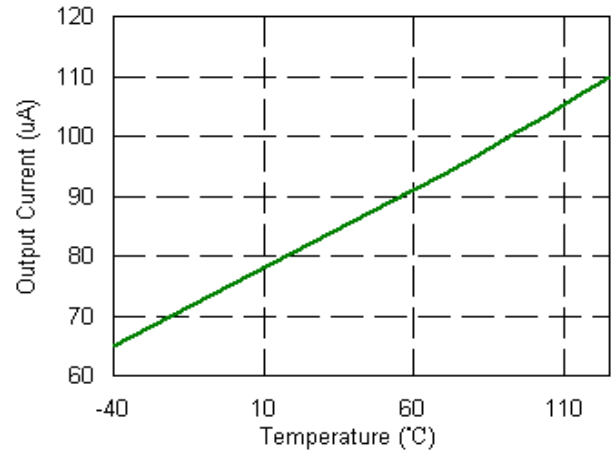


Short-circuit Current vs. Input Voltage

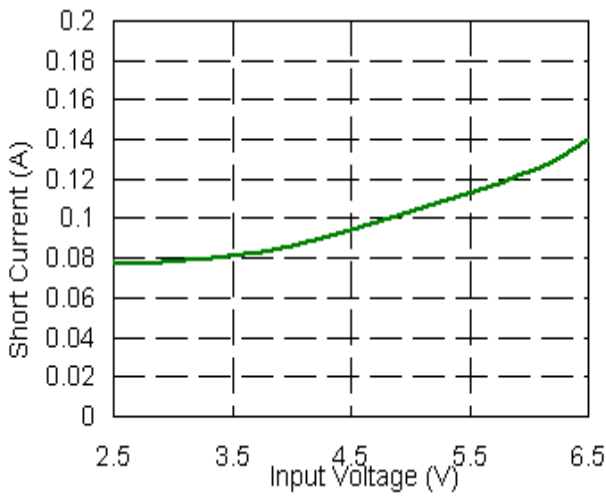


Ground Current vs. Input Voltage

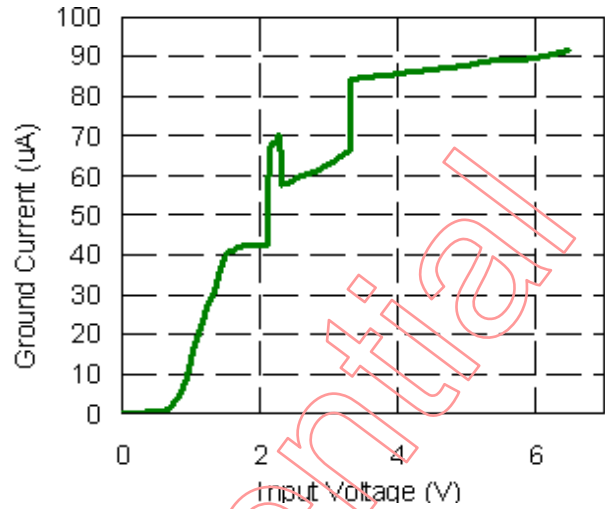


Enable Threshold vs. Input Voltage

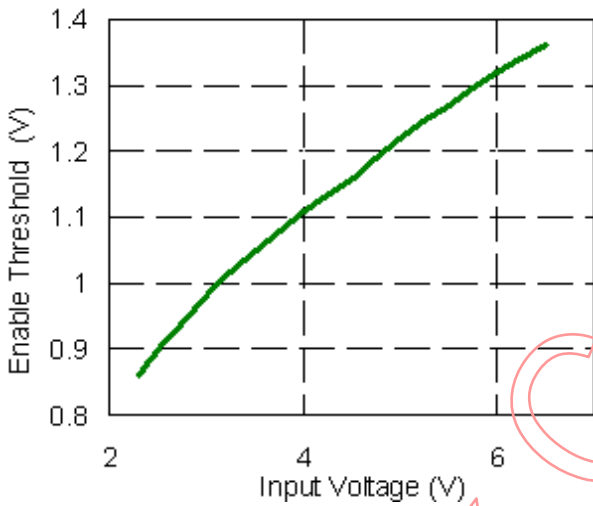


Dropout vs. Load Current

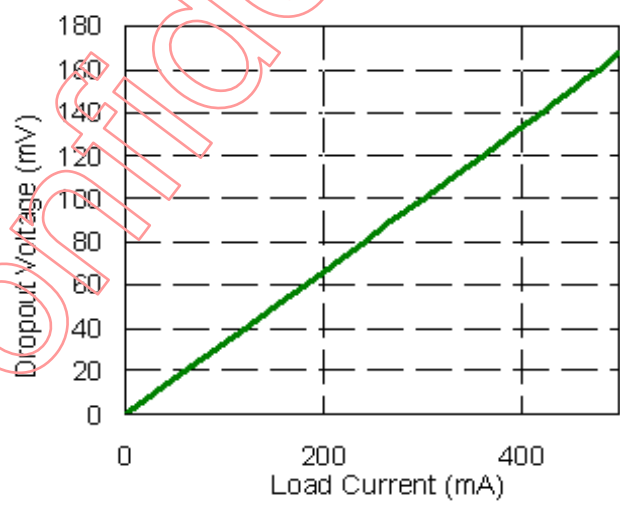


Dropout vs. Temperature (500mA Load)

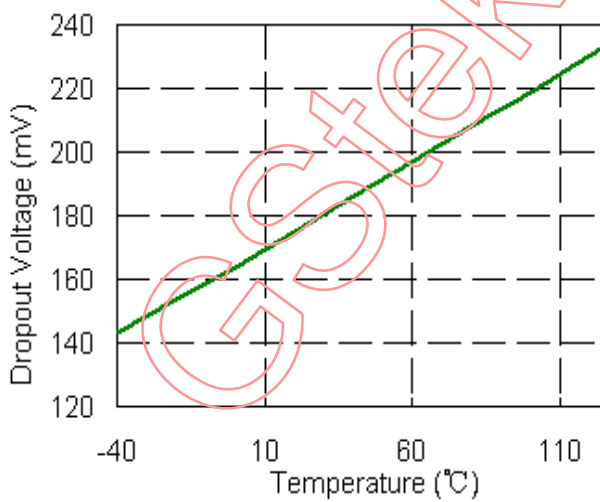


PSRR vs. Frequency

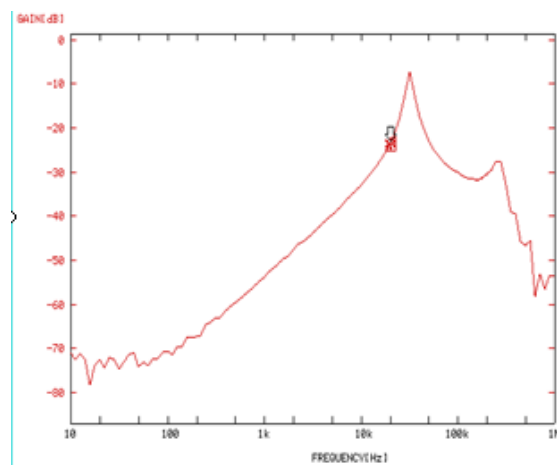


Enable Turn-On (0.1mA)

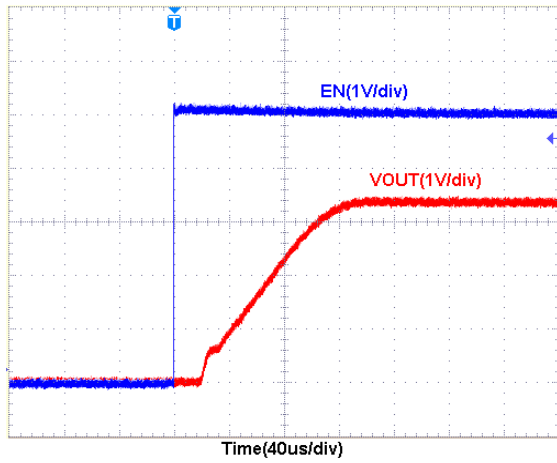


Enable Turn-On (500mA)

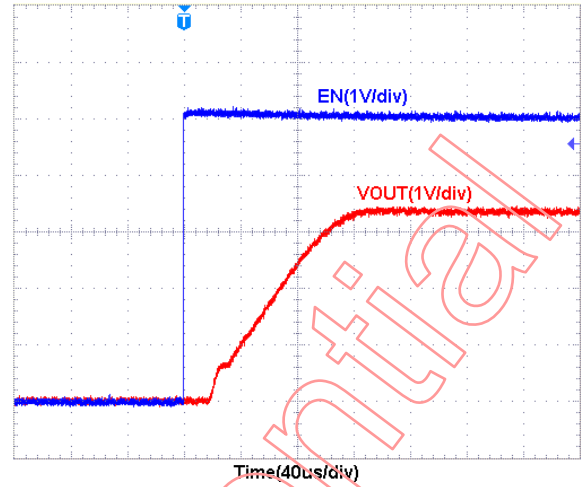


Enable Turn-Off (0.1mA)

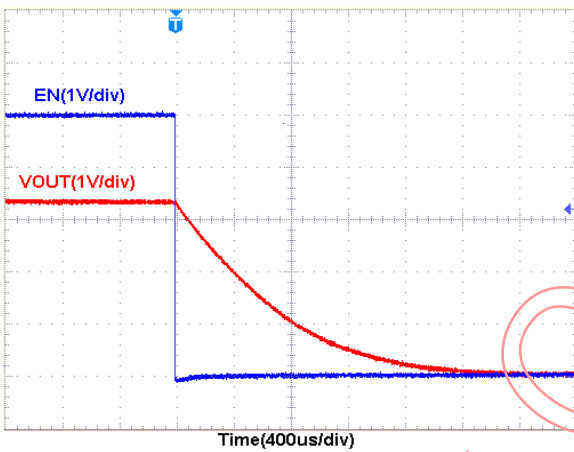

Enable Turn-Off (500mA)

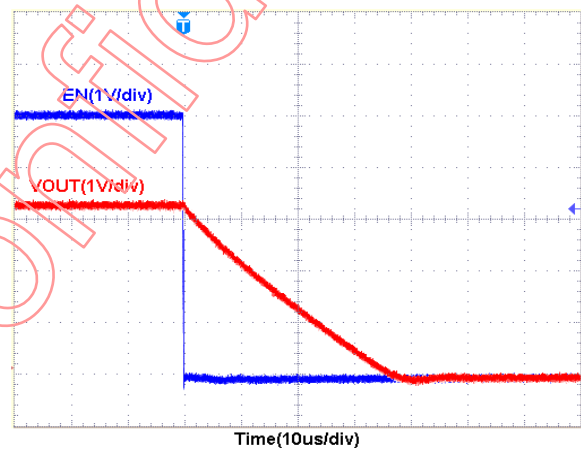


Line Transient Response

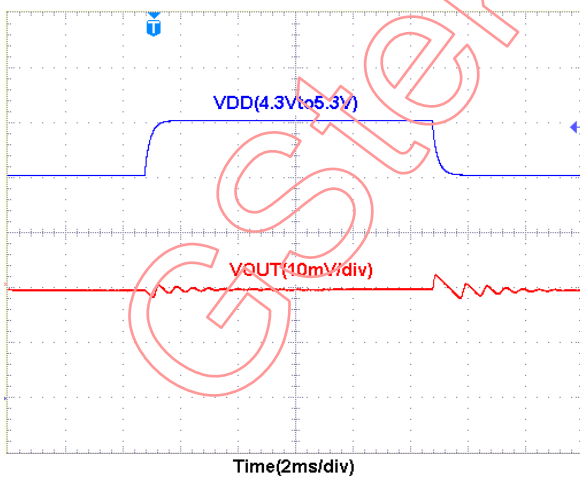

$I_{OUT}=0.1mA$

Load Transient Response

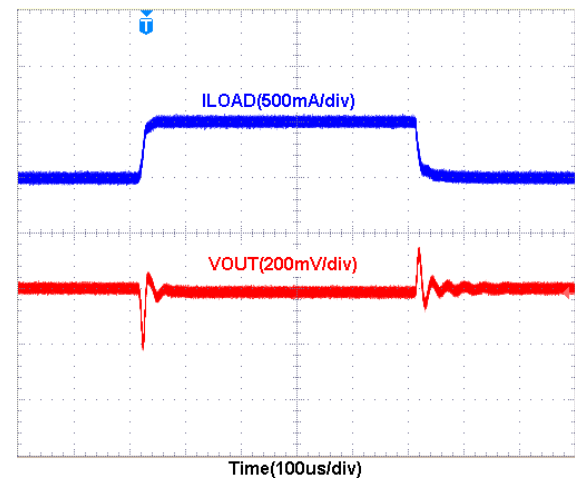

VDD=4.3V

Application Information

Power-on-Reset

The GS7116 features a power-on-reset control through monitor the supply voltage to prevent wrong operation. Only after the supply voltage exceed its rising POR threshold voltage, the regulator is to be initiated and starts up.

Current Limit

The GS7116 contains a foldback over current protection function. It allows the output current to reach the maximum value of 700mA. Then further decreases in the load resistance reduce both the load current and the load voltage. The main advantage of foldback limiting is less power dissipation in the pass transistor under shorted-load conditions. During startup, the current limit value is set to high, thus GS7116 can operate in full load condition. After startup, the current limit value is set to normal value, so the pass transistor is protected well.

Thermal-Shutdown Protection

Thermal Shutdown protects GS7116 from excessive power dissipation. If the die temperature exceeds 160°C, the pass transistor is shut off. 30°C of hysteresis prevents the regulator from turning on until the die temperature drops to 130°C.



Output Capacitor selection

The GS7116 is specifically designed to employ ceramic output capacitor as low as 4.7uF. Place the capacitors physically as close as possible to the device with wide and direct PCB traces.

Input Capacitor selection

Bypass VDD to ground with a 4.7uF or greater capacitor. Ceramic, tantalum or aluminum electrolytic capacitors may be selected for input capacitor. However ceramic capacitors are recommended due to their significant cost and space savings. Place the capacitors physically as close as possible to the device with wide and direct PCB traces.

Package Dimensions, TSOT-23-5

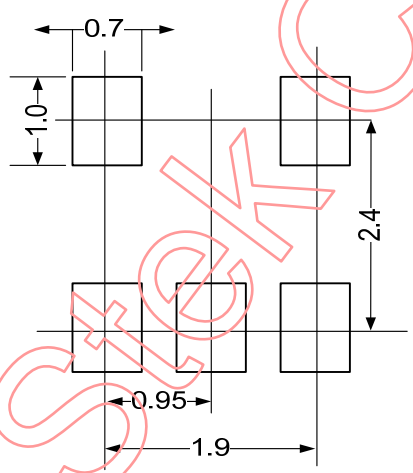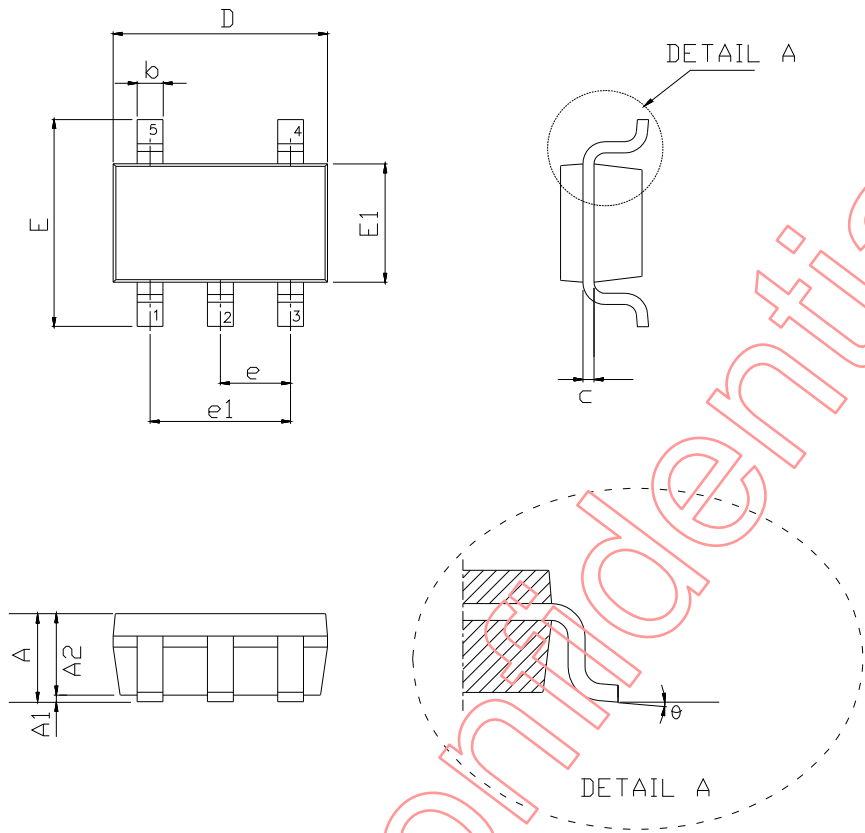


Unit: mm

Symbol	Dimensions in Millimeters	
	Min.	Max.
A	0.70	1.25
A1	0.00	0.15
A2	0.70	1.10
b	0.30	0.50
c	0.08	0.25
D	2.70	3.10
E	2.50	3.10
E1	1.20	1.80
e	0.95 REF.	
e1	1.90 REF.	
L	0.37 REF.	
θ	0°	10°

Note

- 1.Min.: Minimum dimension specified.
- 2.Max.: Maximum dimension specified.
- 3.REF.: Reference. Normal/Regular dimension specified for reference.




Package Dimensions, SOT-23-5

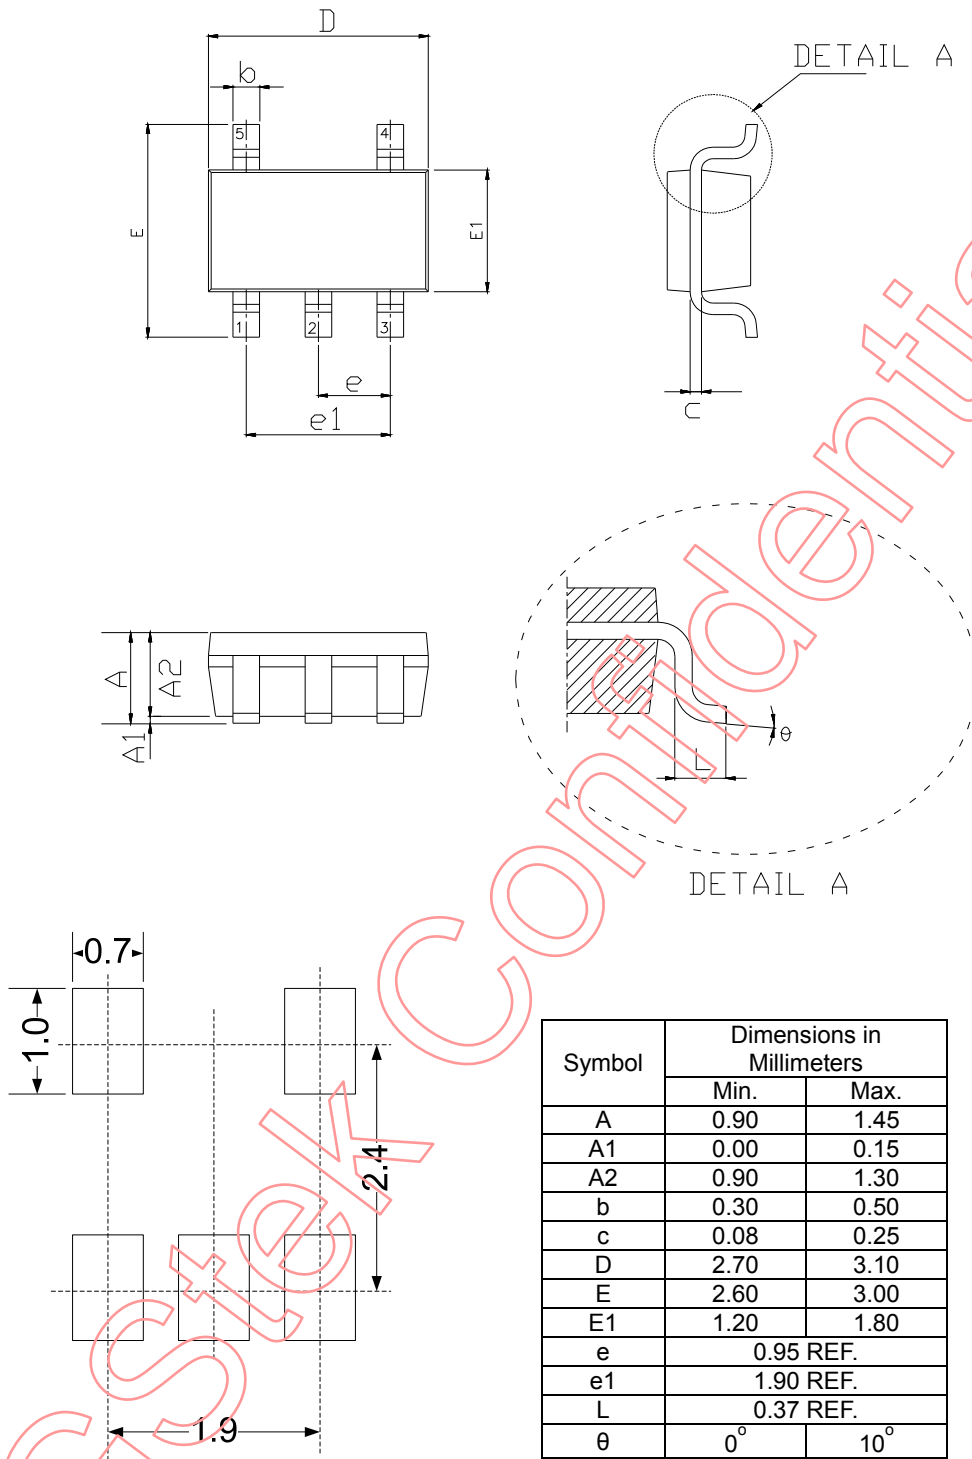


Note

- 1.Min.: Minimum dimension specified.
- 2.Max.: Maximum dimension specified.
- 3.REF.: Reference. Normal/Regular dimension specified for reference.

Package Dimensions, TDFN6-2x2

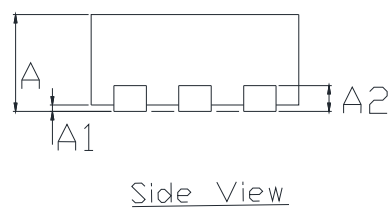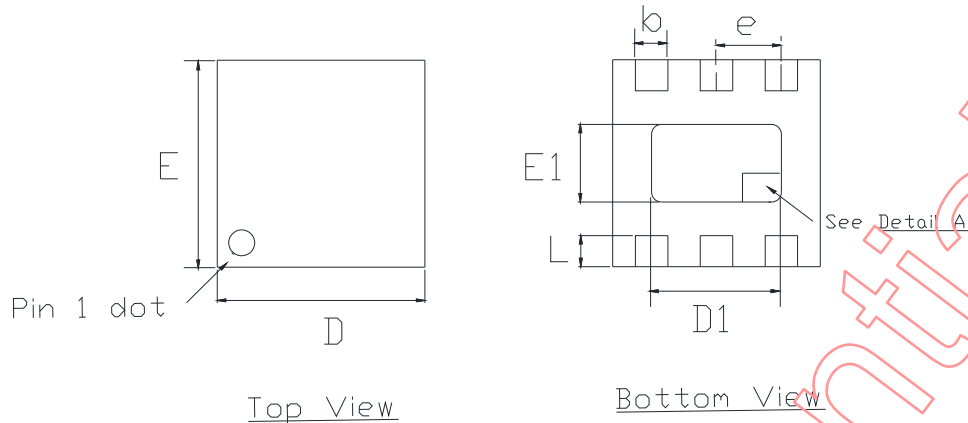

Pin #1 ID Options
 Note: The configuration of the Pin#1 identifier is optional, but must be located within the zone indicated.

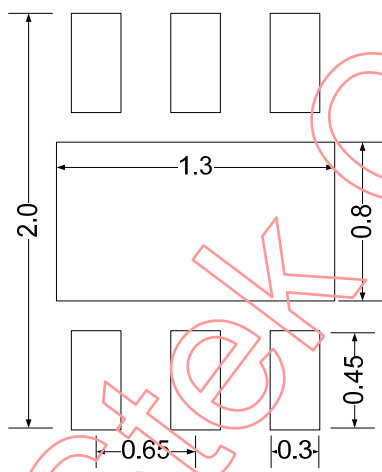

Symbol	Dimensions in Millimeters	
	Min.	Max.
A	0.70	0.80
A1	0.00	0.05
A2	0.203 REF.	
D	1.90	2.10
D1	1.10	1.30
E	1.90	2.10
E1	0.60	0.80
e	0.65 REF.	
L	0.25	0.45

Note

1. Min.: Minimum dimension specified.
2. Max.: Maximum dimension specified.
3. REF.: Reference. Normal/Regular dimension specified for reference.

DISCLAIMERS

Please read the notice stated in this preamble carefully before Admission e accessing any contents of the document attached. Admission of GStek's statement therein is presumed once the document is released to the receiver.

Notice:

Firstly, GREEN SOLUTION CO., LTD. (GStek) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its information herein without notice. And the aforesaid information does not form any part or parts of any quotation or contract between GStek and the information receiver.

Further, no responsibility is assumed for the usage of the aforesaid information. GStek makes no representation that the interconnect of its circuits as described herein will not infringe on exiting or future patent rights and other intellectual property rights, nor do the descriptions contained herein express or imply that any licenses under any GStek patent right, copyright, mask work right, or other GStek intellectual property right relating to any combination, machine, or process in which GStek products or services are used.

Besides, the product in this document is not designed for use in life support appliances, devices, or systems where malfunction of this product can reasonably be expected to result in personal injury. GStek customers' using or selling this product for use in such applications shall do so at their own risk and agree to fully indemnify GStek for any damage resulting from such improper use or sale.

At last, the information furnished in this document is the property of GStek and shall be treated as highly confidentiality; any kind of distribution, disclosure, copying, transformation or use of whole or parts of this document without duly authorization from GStek by prior written consent is strictly prohibited. The receiver shall fully compensate GStek without any reservation for any losses thereof due to its violation of GStek's confidential request. The receiver is deemed to agree on GStek's confidential request therein suppose that said receiver receives this document without making any expressly opposition. In the condition that aforesaid opposition is made, the receiver shall return this document to GStek immediately without any delay.