

1A SYNCHRONOUS BUCK SWITCHER WITH FET ON BOARD

ADVANCE DATA SHEET

Pb Free Product

DESCRIPTION

The NX4107 is a current mode PWM buck switcher with internal compensation, can provides up to 1A output current with FET on board. It operates from 2.7V to 5.5V and output as low as 0.6V which is ideal for the application with single cell Li-Ion battery as well as other 3.3V input bus supply applications. Switching frequency is fixed 1MHz, small surface mount inductors and capacitors are allowed to use, make it good for portable applications.

NX4107 is available in 5-pin SOT23 package.

- SOT23-5L package
- Internal Digital Soft Start
- Internally-compensated Current mode controller
- <1uA shut-down current
- Peak Current Limit with HICCUP feature and Over temperature protection
- Prebias start up Operation
- Fixed 1.5V, 1.8V versions and adjustable versions are available
- 100% duty ratio operation capability
- Pb-free and RoHS compliant

FEATURES

APPLICATIONS

- Li-Ion battery operated portable system
- Cellular Phones
- Portable applications
- USB Devices

TYPICAL APPLICATION

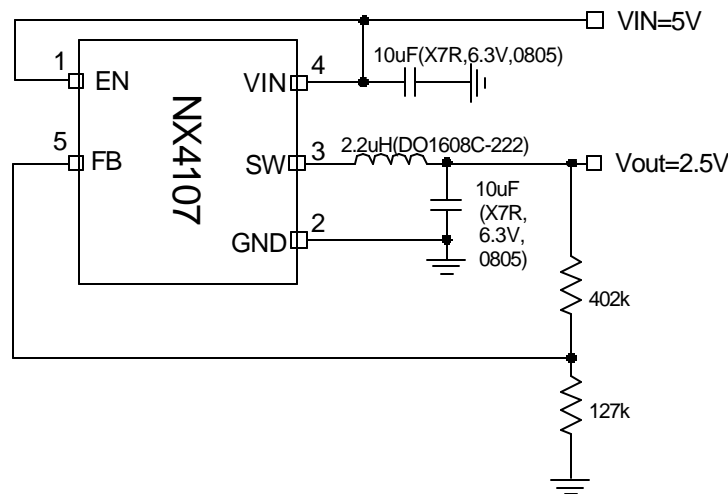


Figure1 - Typical application of NX4107CZ1TR

ORDERING INFORMATION

Device	Temperature	Package	Pb-Free
NX4107CZ1TR	-40°C to 85°C	SOT23-5L	Yes
NX4107-XXCZ1TR	-40°C to 85°C	SOT23-5L	Yes

Note: Fixed output voltage identification.

XX=15 Fixed Output Voltage=1.5V


XX=18 Fixed Output Voltage=1.8V

ABSOLUTE MAXIMUM RATINGS

VIN,VDD to GND	-0.3V to 6V
SW,FB,EN to GND	-0.3V to VIN + 0.3V
ESD Susceptibility	1kV
Lead Temperature(Soldering,10sec.)	300°C
Storage Temperature Range	-55°C to 150°C
Operating Junction Temperature Range	-40°C to 150°C

CAUTION: Stresses above those listed in "ABSOLUTE MAXIMUM RATINGS", may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

PACKAGE INFORMATION

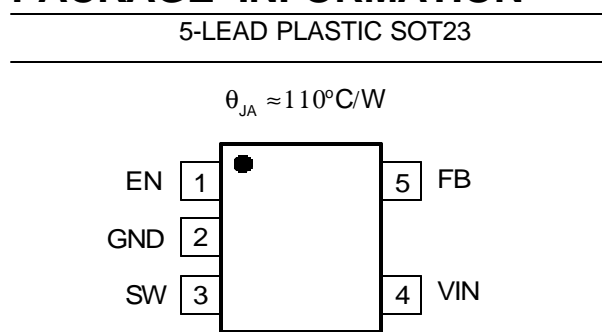

ELECTRICAL SPECIFICATIONS

$T_A = -40^{\circ}\text{C}$ to 85°C , $V_{IN} = 3.3\text{V}$. Typical data refers to $T_A = 25^{\circ}\text{C}$. Unless otherwise specified.

PARAMETER	SYM	Test Condition	Min	TYP	MAX	Units
Reference Voltage						
Ref Voltage	V_{REF}			0.6		V
Accuracy			-3.5		3.5	%
Line Regulation						
Line Regulation		$V_{IN} = 2.7\text{V}$ to 5.5V			0.5	%/V
VIN UVLO						
VIN rising threshold					2.6	V
VIN falling threshold			1.8			V
Supply Voltage(VIN)						
VIN Input Voltage Range	V_{IN}		2.7		5.5	V
Shutdown Current	$I_{shutdown}$	EN=GND		1	2	μA
Quiescent Current	I_q	No Load, adjustable output		25	50	μA
Oscillator (Rt)						
Frequency	F_s			1		MHz
Max Duty Cycle				100		%
Min ON time				70	100	nS
Error Amplifiers						
Feedback Input Bias Current					0.05	μA
SS						
Soft Start time	T_{ss}			100		μS

PARAMETER	SYM	Test Condition	Min	TYP	MAX	Units
Current Limit						
Current Limit Threshold			1			A
Thermal Shutdown						
Thermal shutdown trip point				155		°C
Hysteresis				15		°C
Internal Switch						
Rdson of Control FET		Vin=5V		260		mohm
Rdson of Synchronous FET				200		mohm
Enable						
En low Threshold voltage					0.4	V
En high Threshold voltage			1.4			V

PIN DESCRIPTIONS

PIN SYMBOL	PIN DESCRIPTION
SW	SW output. Junction of the internal high-side and low-side power MOSFETs, and output inductor.
GND	Ground Connection for Chip. Connect GND with large copper areas to the input and output supply returns, and negative terminals of the input and output capacitors.
FB	Error amplifier inverting input. Connect directly to output voltage for fixed version of chip. Connect to an external resistor divider for the adjustable version. A 400kohm resistor is recommended to be connected from VOUT and FB for adjustable version.
VIN	Supply voltage input for switcher.
EN	Enable input. Set this pin to GND or less than 0.4V will shut down the regulator.

BLOCK DIAGRAM

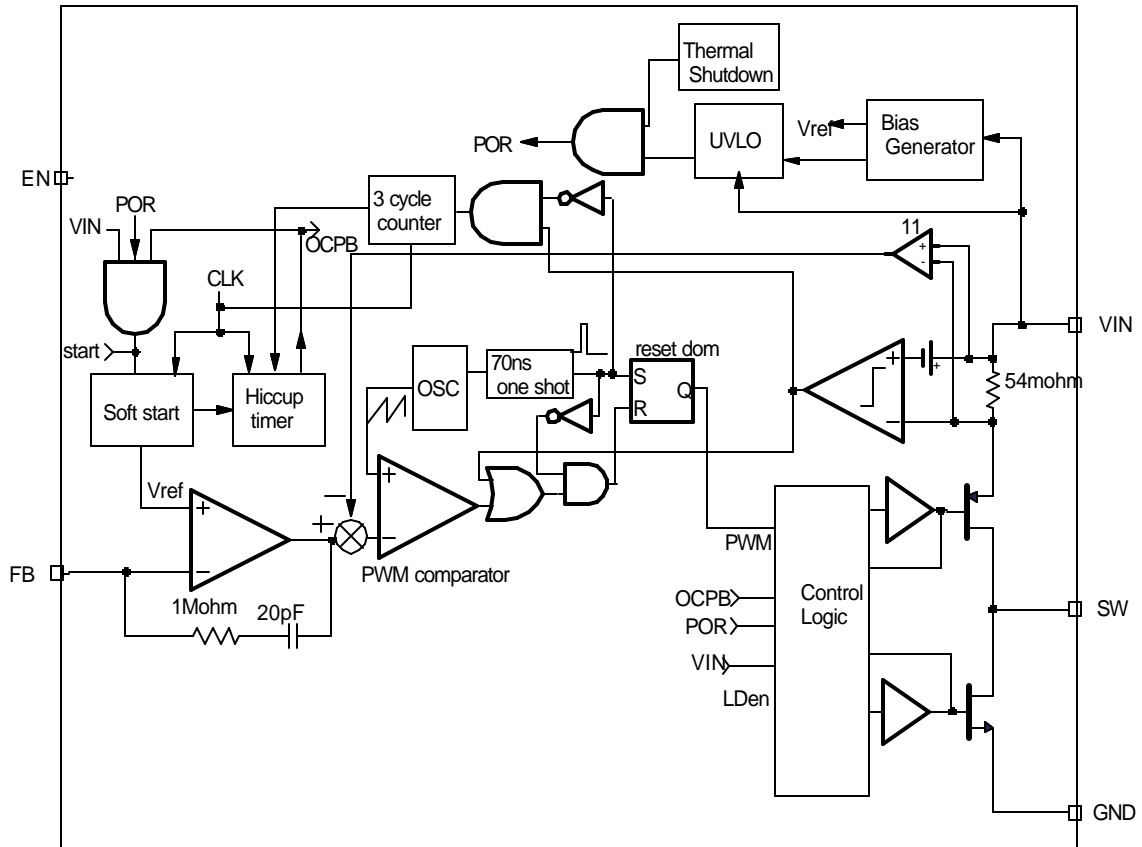


Figure 2 - Simplified block diagram of the NX4107

Typical Operating Characteristics

Reference voltage vs temperature

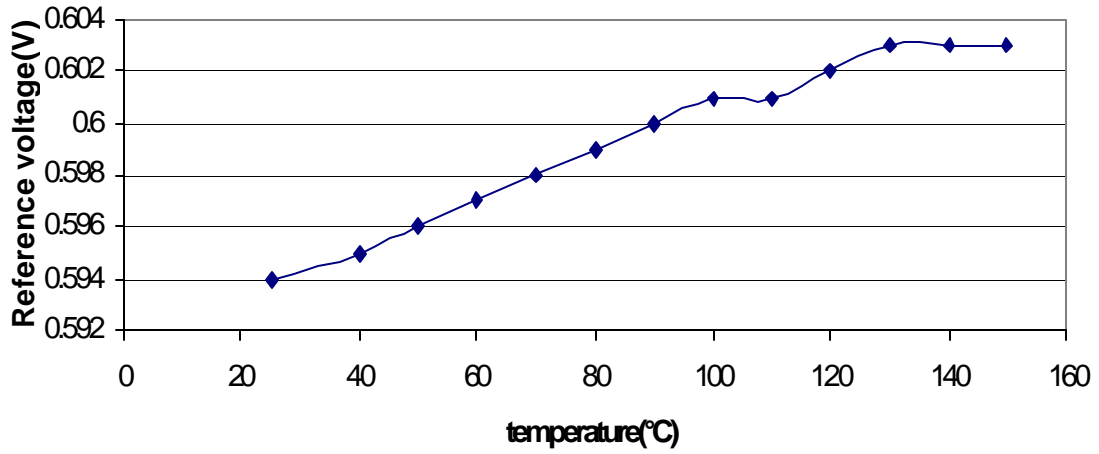


Fig.3 Reference volateg vs temperature

Frequency vs temperature

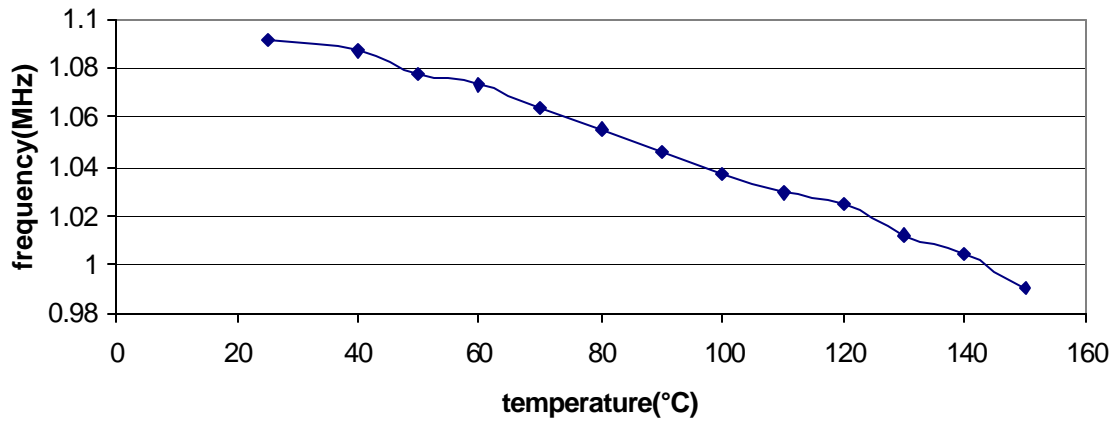


Fig.4 Frequency vs temperature

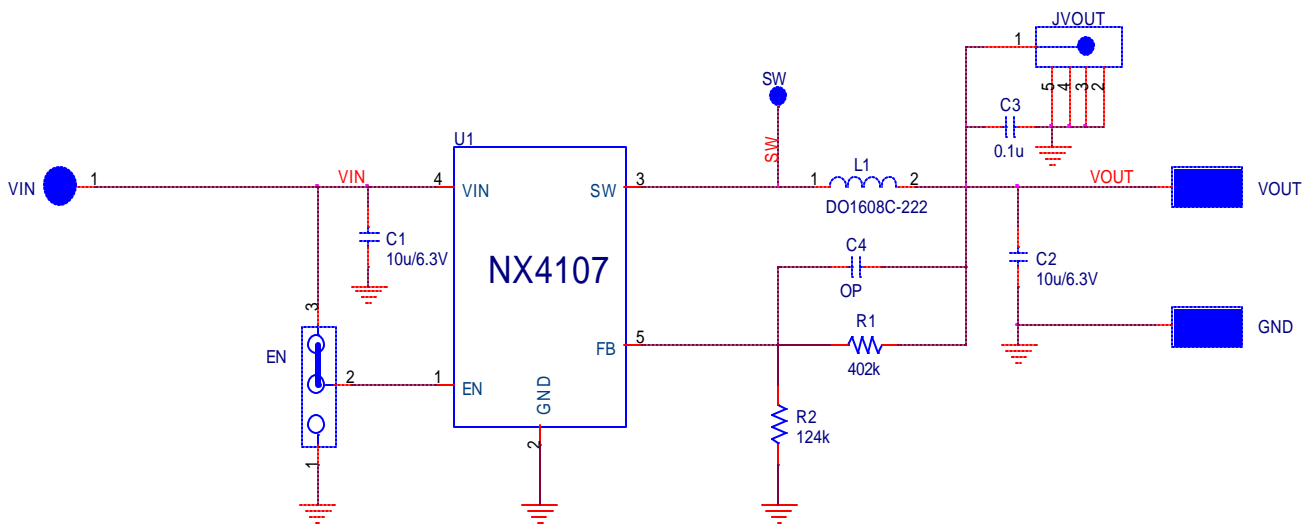


Figure 5 - Demo board schematic based on ORCAD

Demoboard waveforms

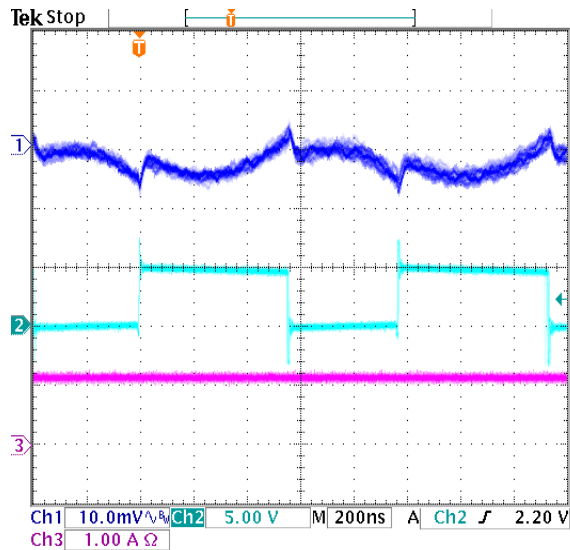


Fig.6 Output ripple @1A

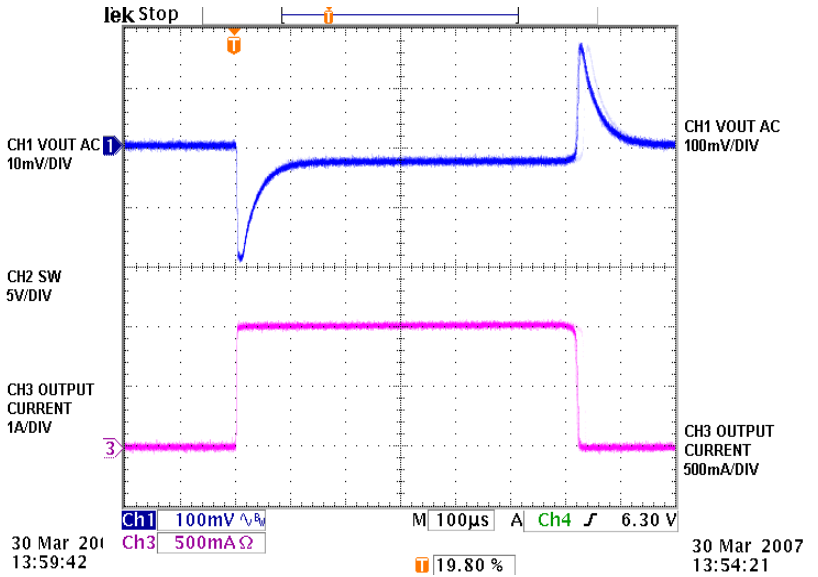


Fig.7 1A transient response

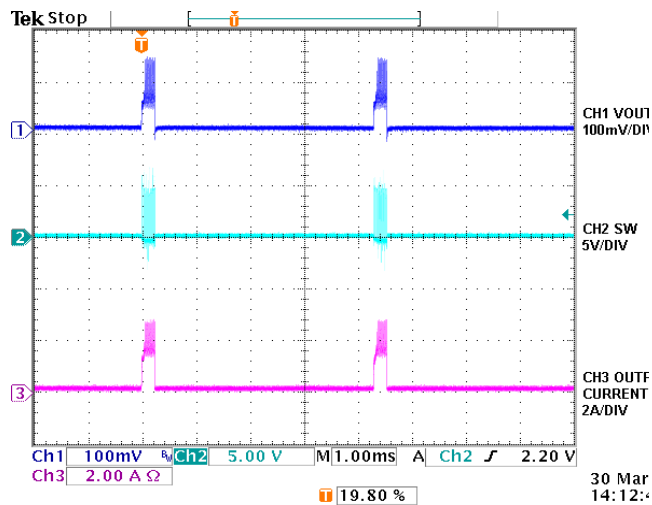


Fig.8 Short circuit protection

4107 Efficiency Test

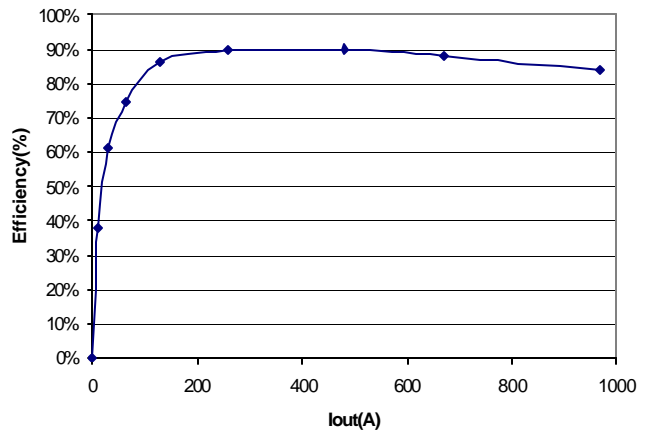


Fig.9 Efficiency